



Energy Technologies Area

Lawrence Berkeley National Laboratory

Michigan Public Service Commission Integrated Resource Planning Stakeholder Group Meeting

Tom Eckman and Natalie Mims

August 8, 2017

This work was supported by the DOE Office of Electricity Delivery and Energy Reliability under Lawrence Berkeley National Laboratory Contract No. DE-AC02-05CH11231.

Today's Agenda

Time	Content
9:00 – 10:00 am	Review of IRP content and development process <ul style="list-style-type: none">• Focus on treatment of efficiency and demand response
10:00 – 11:00 am	Time-varying value of energy efficiency research
11:00 - Noon	Uncertainty and Risk Analysis
Noon – 1:30 pm	Lunch break
1:30 – 3:30	Stakeholder engagement



Energy Technologies Area

Lawrence Berkeley National Laboratory

Time-Varying Value of Energy Efficiency

Natalie Mims and Tom Eckman

August 8, 2017

This work was supported by the DOE Office of Energy Efficiency & Renewable Energy Building Technologies Office under Lawrence Berkeley National Laboratory Contract No. DE-AC02-05CH11231.

Project Objective and Scope

- ◆ Advance consideration of the value of demand-side energy efficiency measures during times of peak electricity demand and high electricity prices through quantitative examples of the value of energy efficiency at times of system peak
- ◆ Increase awareness of available end-use load research and its application to time-varying valuation of energy efficiency
- ◆ Increase awareness of the gaps in, and need for, research on energy savings shape
- ◆ Recommend methodology(ies) to appropriately value energy efficiency for meeting peak demand
- ◆ Consider changes to efficiency valuation methodologies to address the changing shape of net load (total electric demand in the system minus wind and solar)

Study Approach

- Summarize state of end-use load research and existing analyses that quantify benefits of electric efficiency measures and programs during peak demand and high electricity prices
- Document time-varying energy and demand impacts of 5 measures in 4 locations:

Measures

- ❑ Exit sign (Flat load shape)
- ❑ Commercial lighting
- ❑ Residential lighting
- ❑ Residential water heater
- ❑ Residential air conditioning

State/Region


- ❑ Pacific Northwest
- ❑ California
- ❑ Massachusetts
- ❑ Georgia

- Use publicly available avoided costs from each location and one of the following methodologies:
 1. Use seasonal system peaks, coincidence factors and diversity factors to determine peak/off-peak savings and apply seasonal avoided costs to savings, *or*
 2. Apply hourly avoided costs to each measure load shape to calculate the time-varying value of measure.


End-use Load Shapes and Energy Savings Shapes

- ◆ Definitions:
 - **End-use load shape:** Hourly consumption of an end-use (e.g., residential lighting, commercial HVAC) over the course of one year.
 - **Energy savings shape:** The difference between the hourly use of electricity in the baseline condition and the hourly use post-installation of the energy efficiency measure (e.g., the difference between the hourly consumption of an electric resistance water heater and a heat pump water heater) over the course of one year.
- ◆ The time pattern of savings from the substitution of a more efficient technology does not always mimic the underlying end-use.
- ◆ Examples:
 - Controls can reduce hours of operation (e.g., occupancy sensor or changing duty cycle), resulting in the shape of savings being different than the underlying end-use.
 - Improved end-use technology and controls (daylighting controls, sensors and software to power down computers when not in use)


End Use vs. Energy Savings Load Shapes

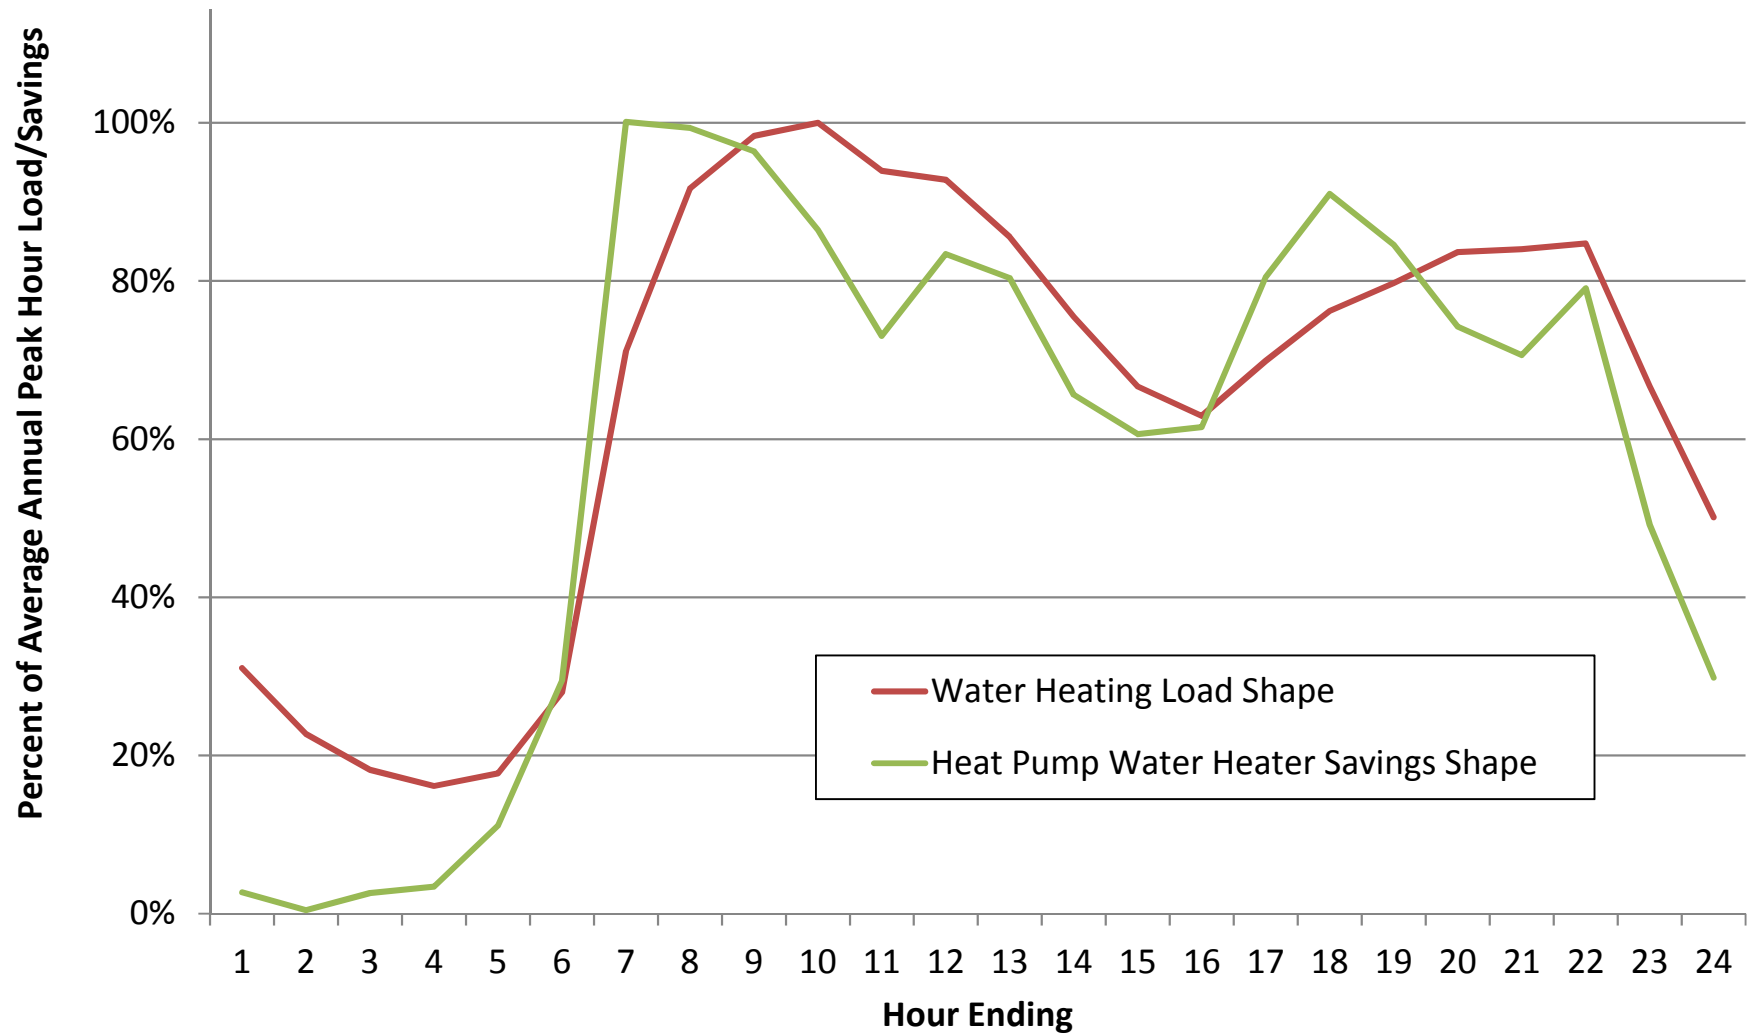


2016 System Load Shapes

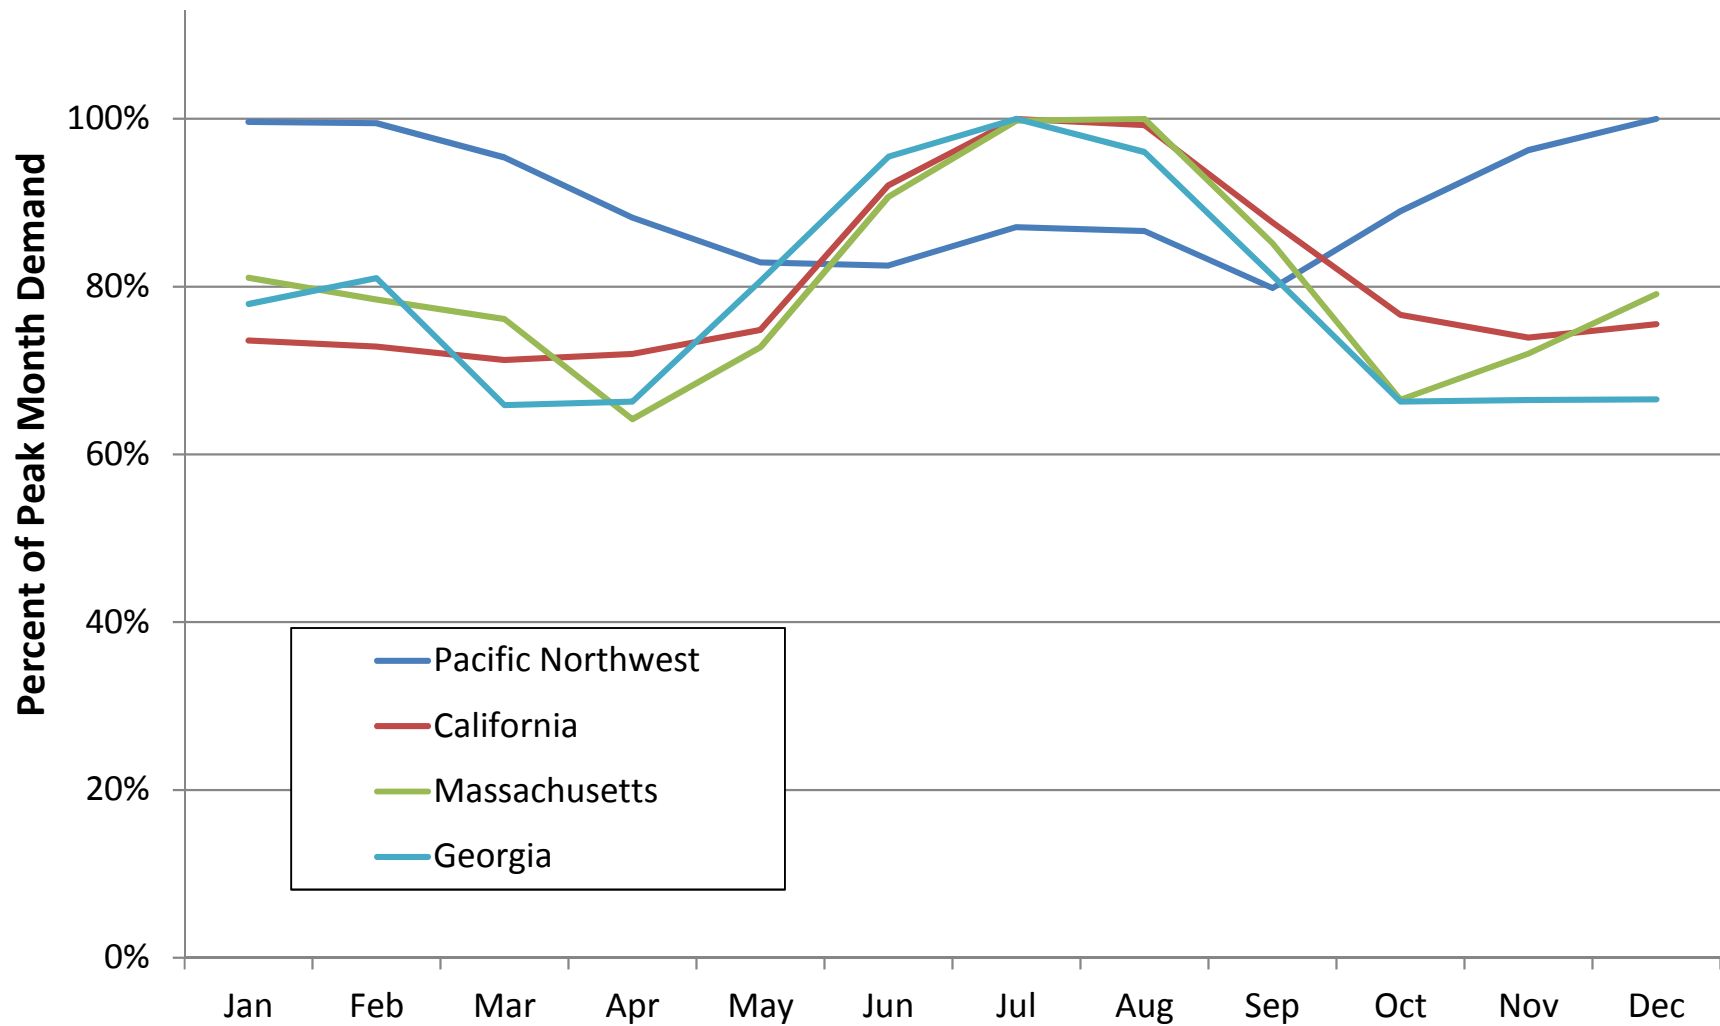


Pacific Northwest System Shapes and End-Use Load Shapes

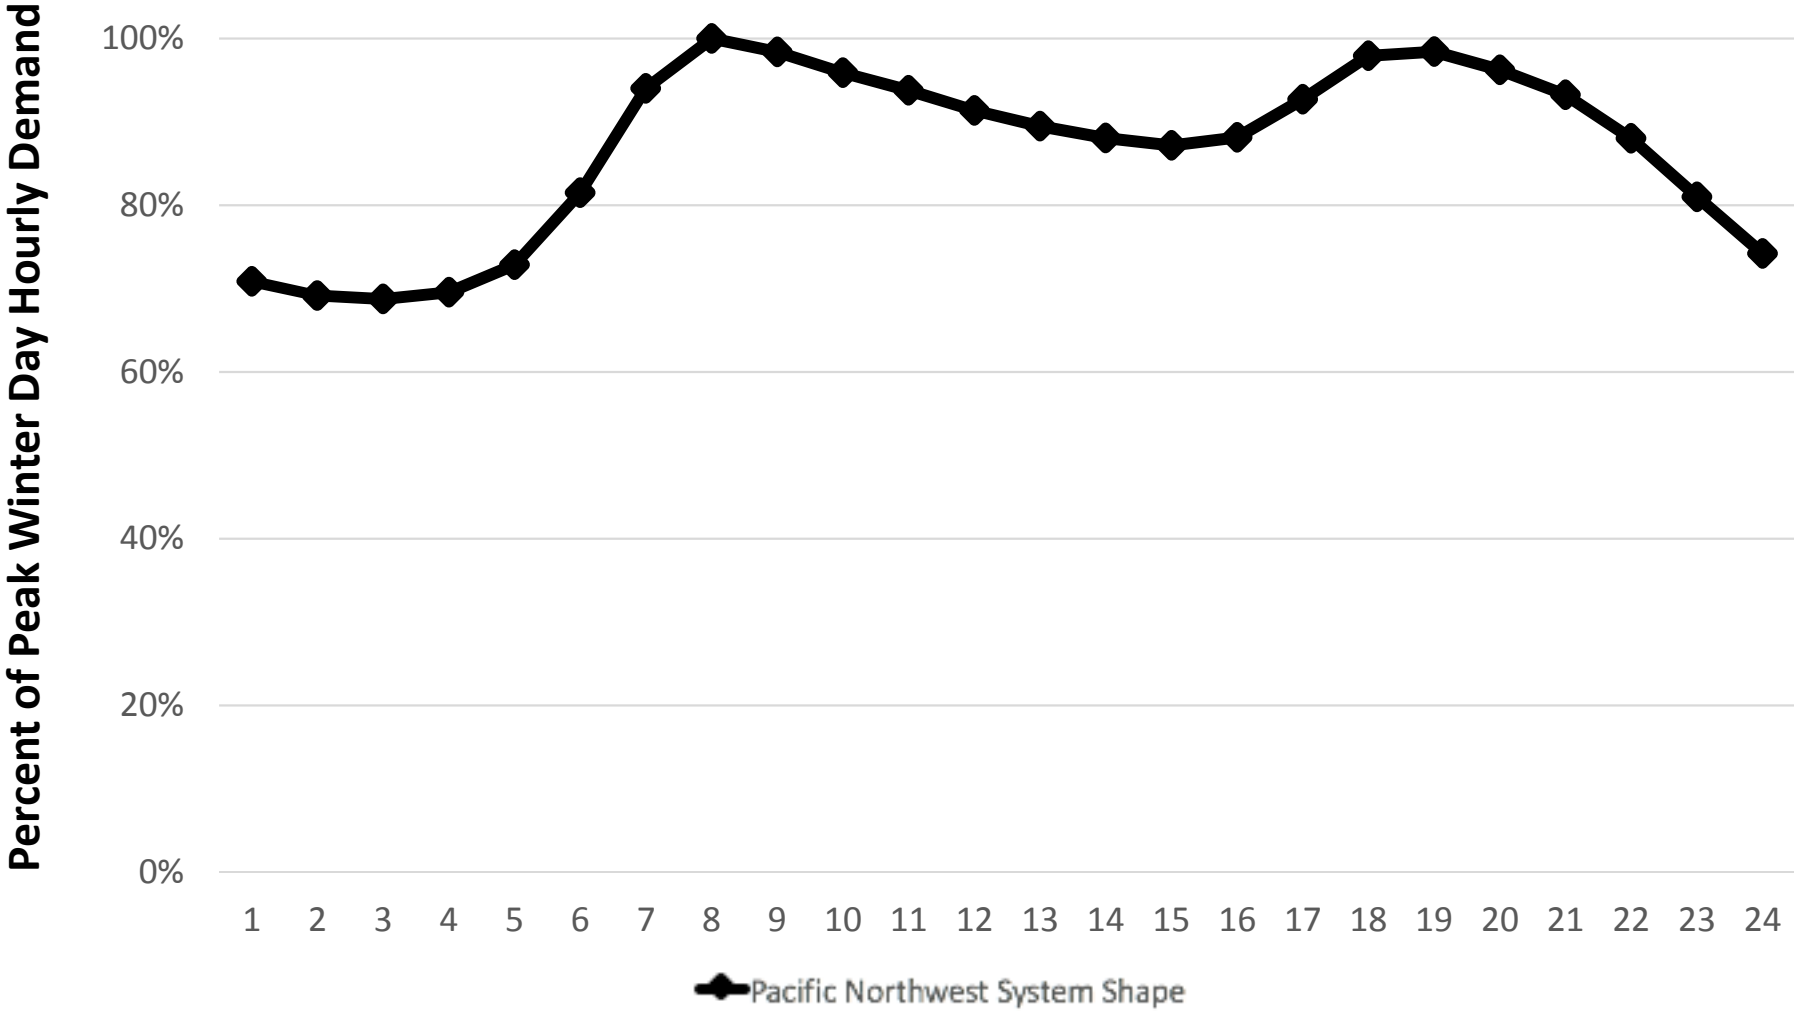


Pacific Northwest System Shapes and End-Use Load Shapes

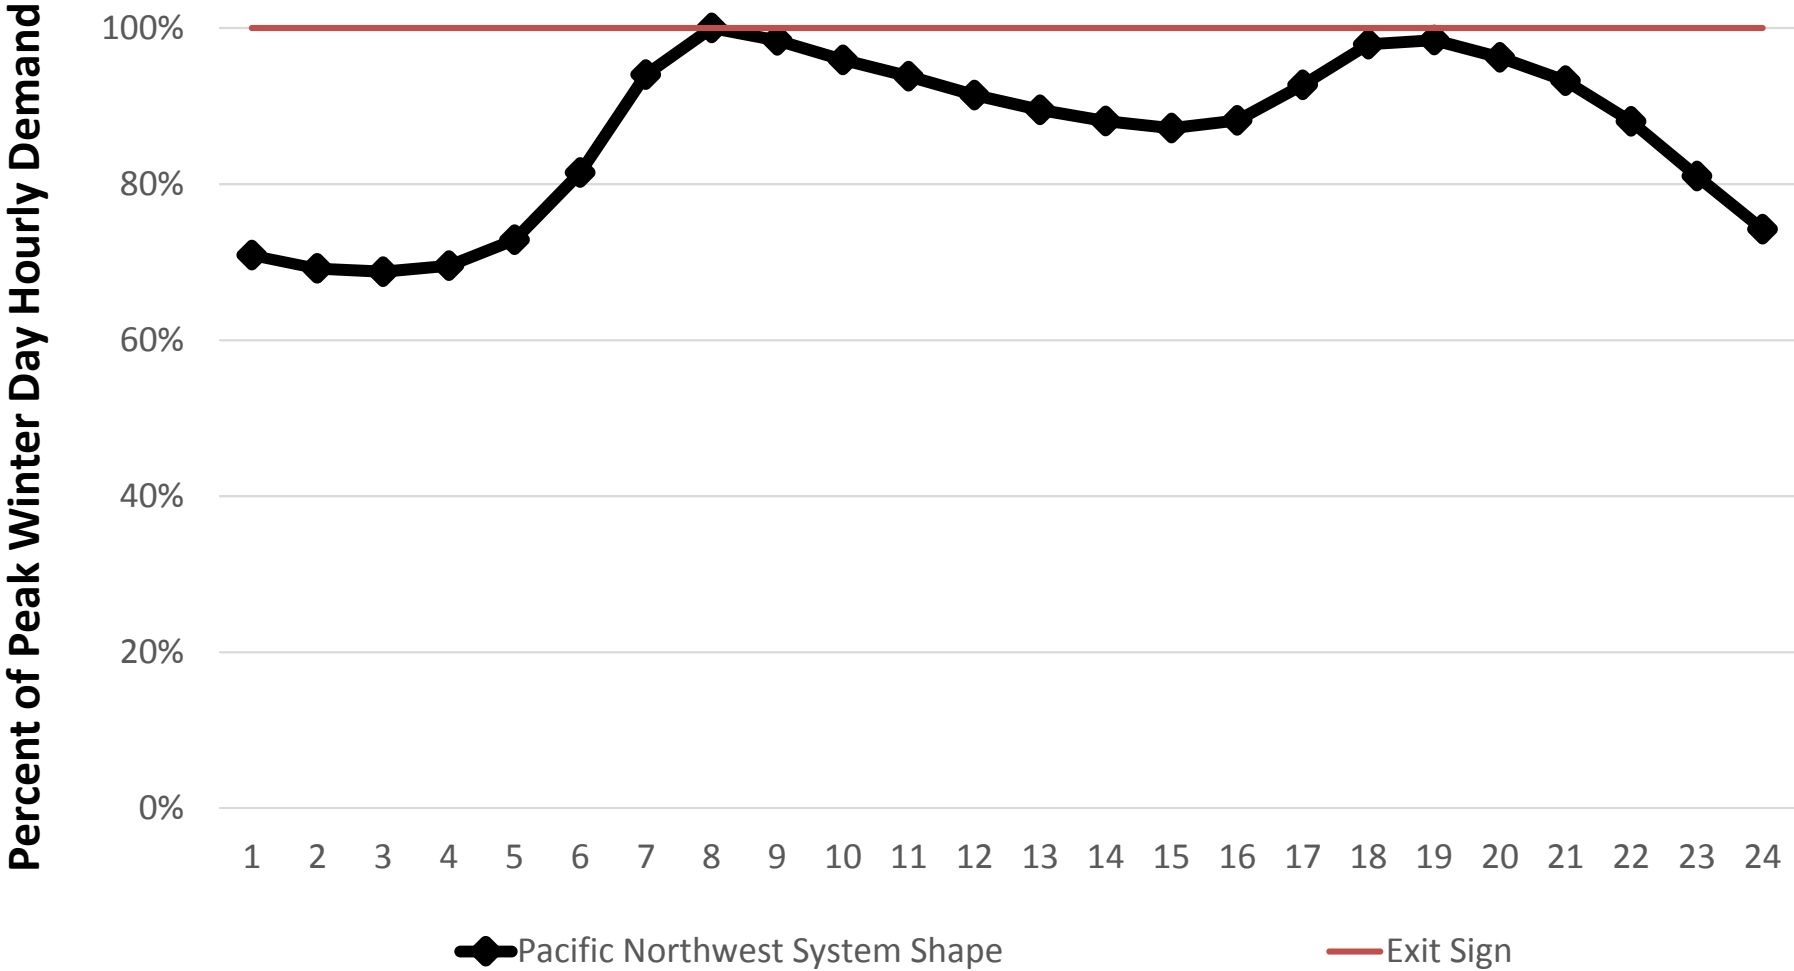


Pacific Northwest System Shapes and End-Use Load Shapes

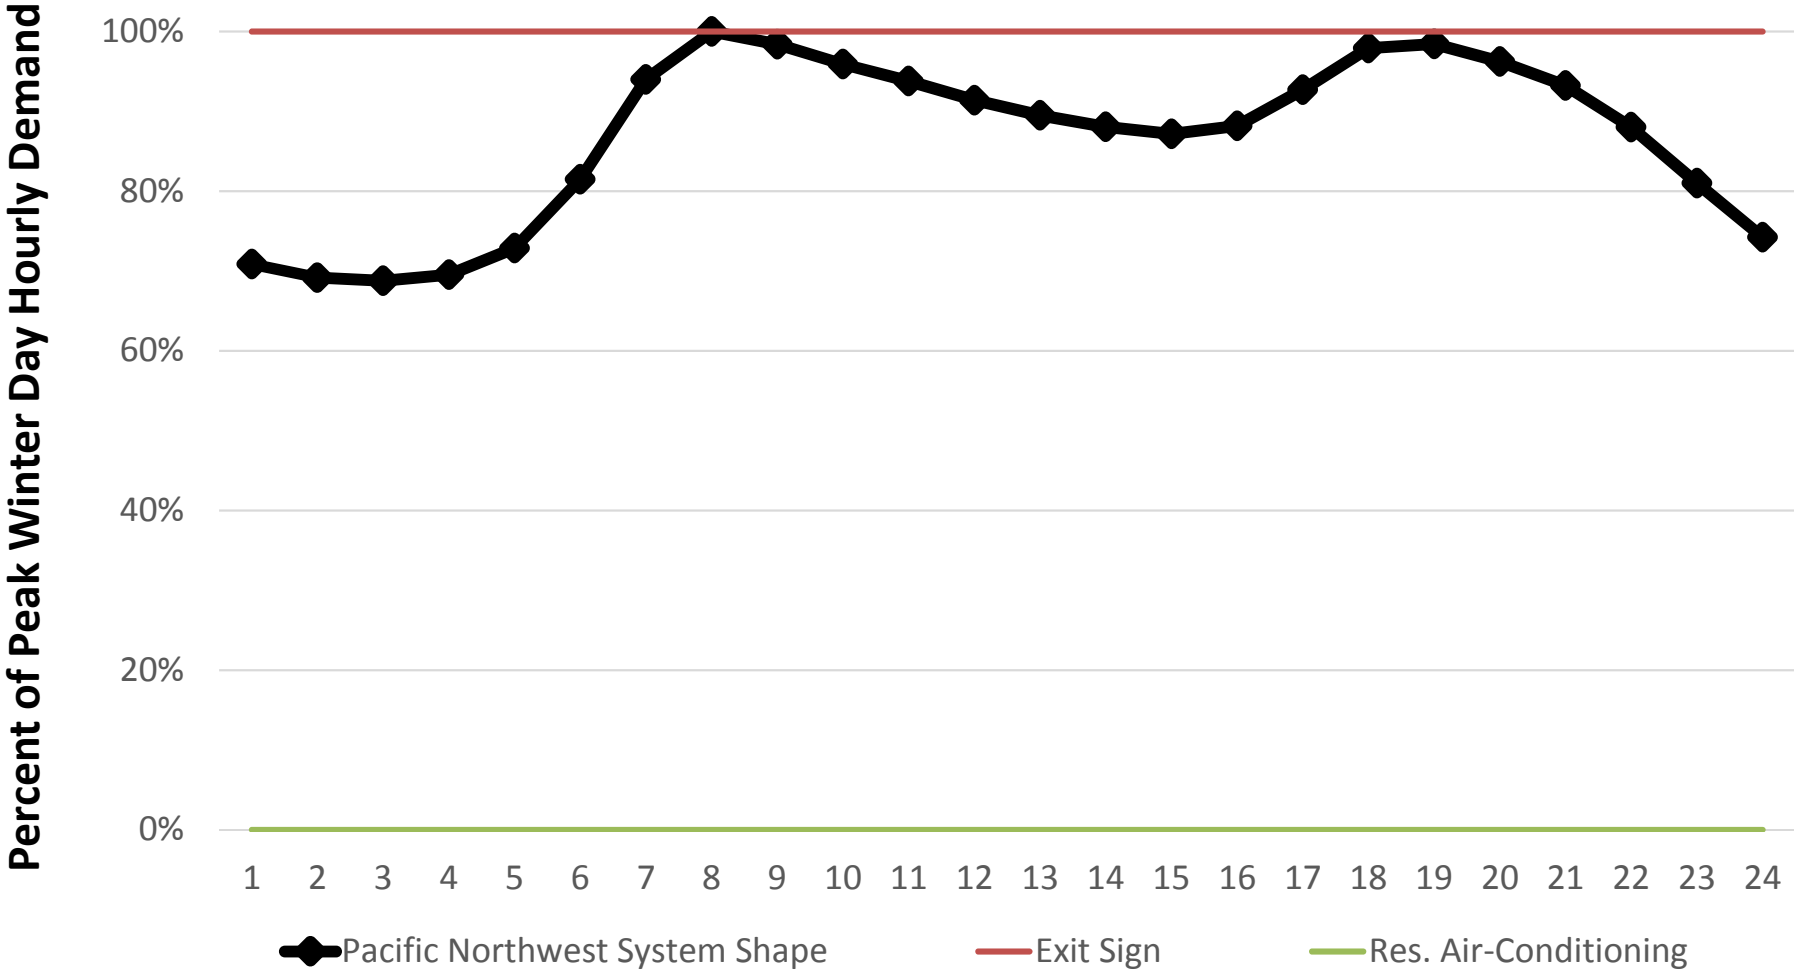


Pacific Northwest System Shapes and End-Use Load Shapes

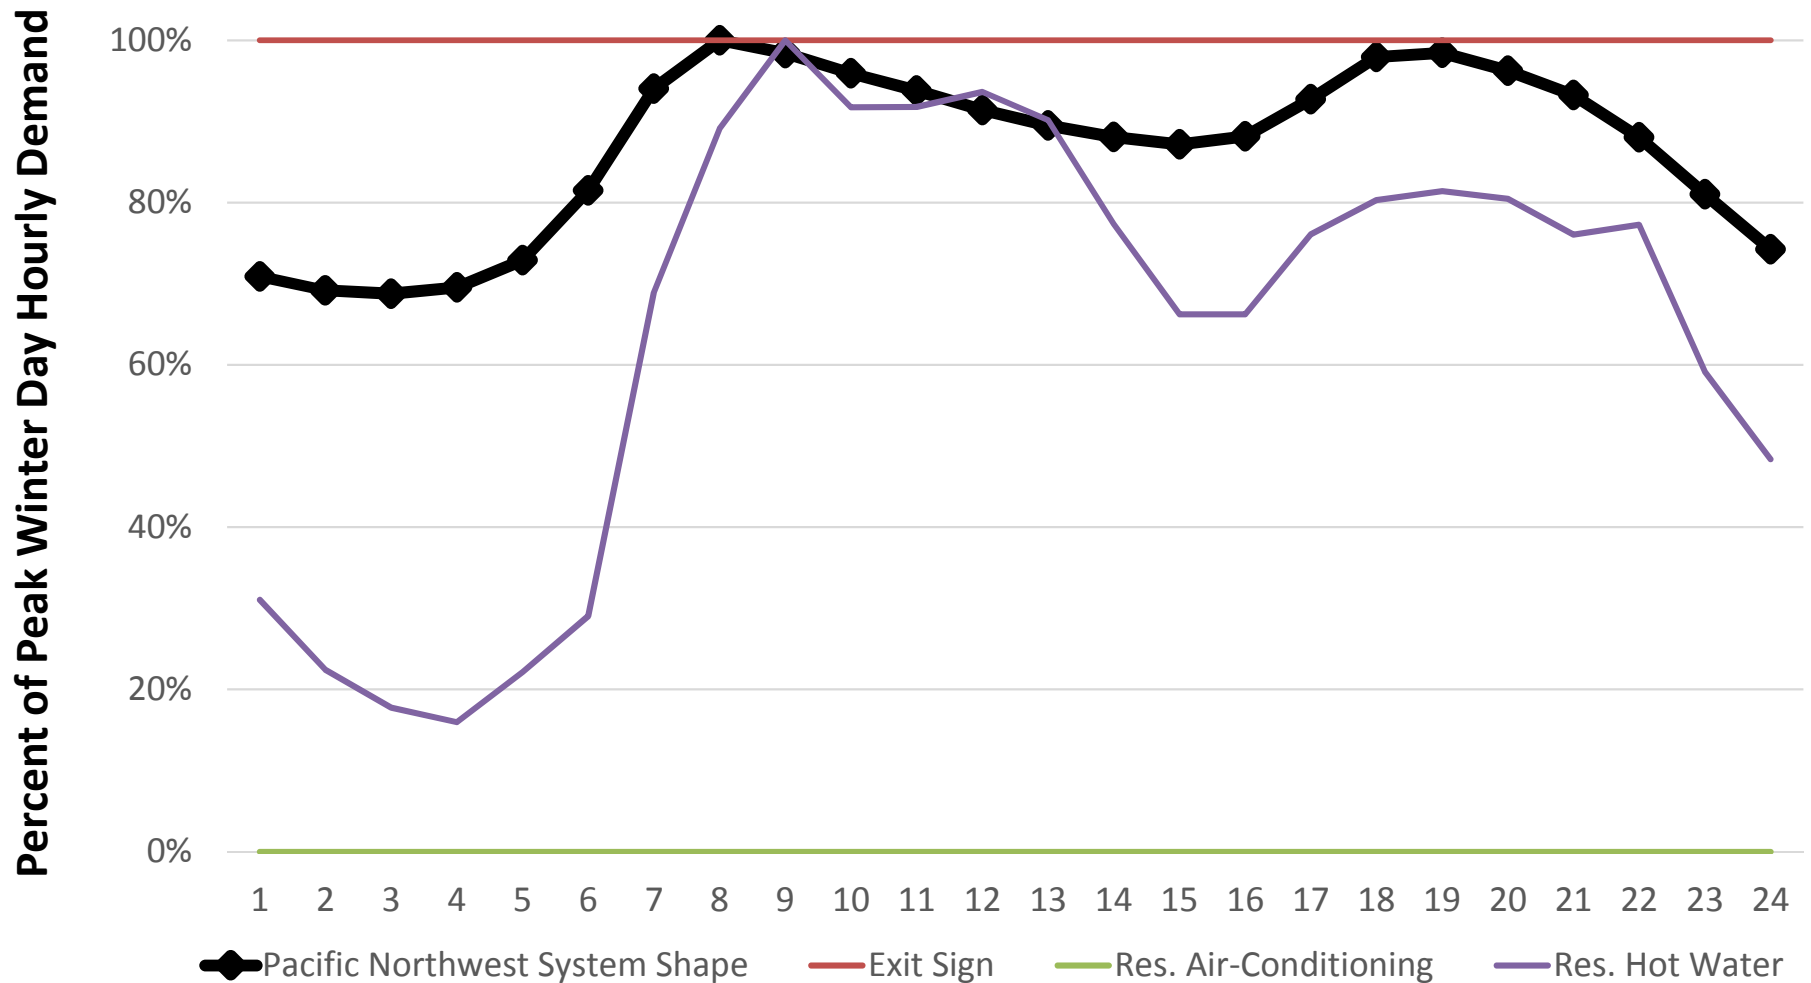


Pacific Northwest System Shapes and End-Use Load Shapes

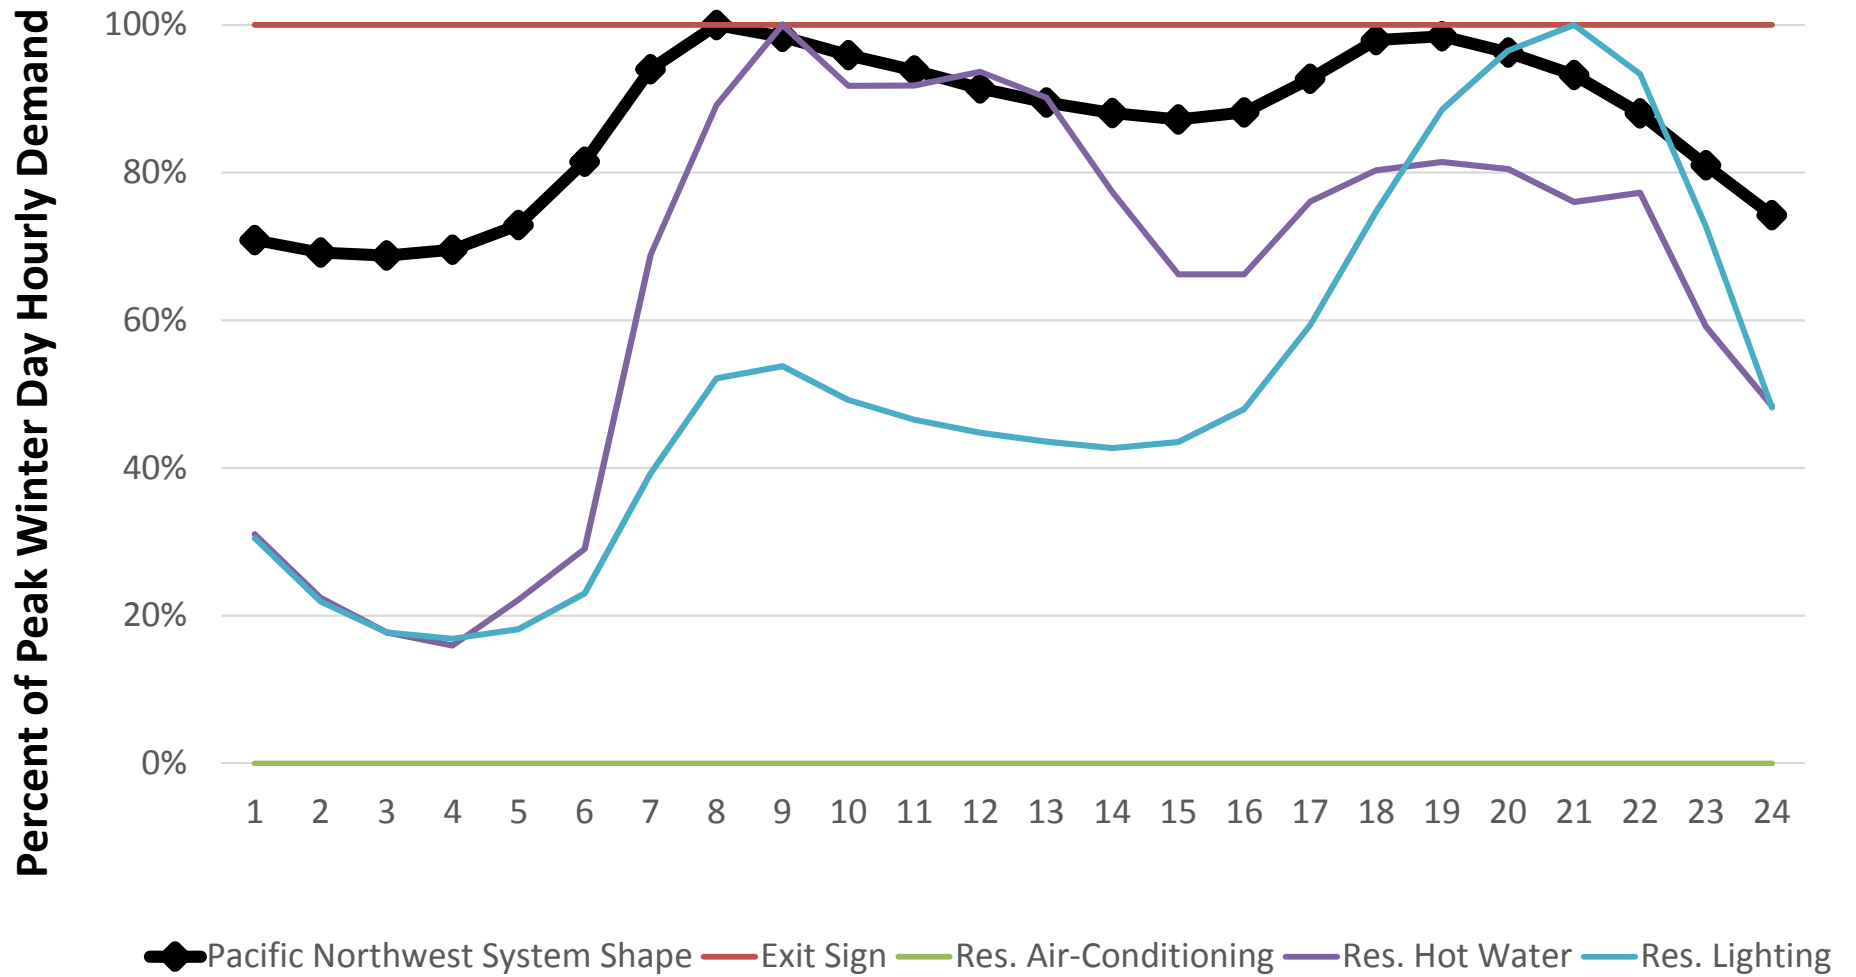


Pacific Northwest System Shapes and End-Use Load Shapes

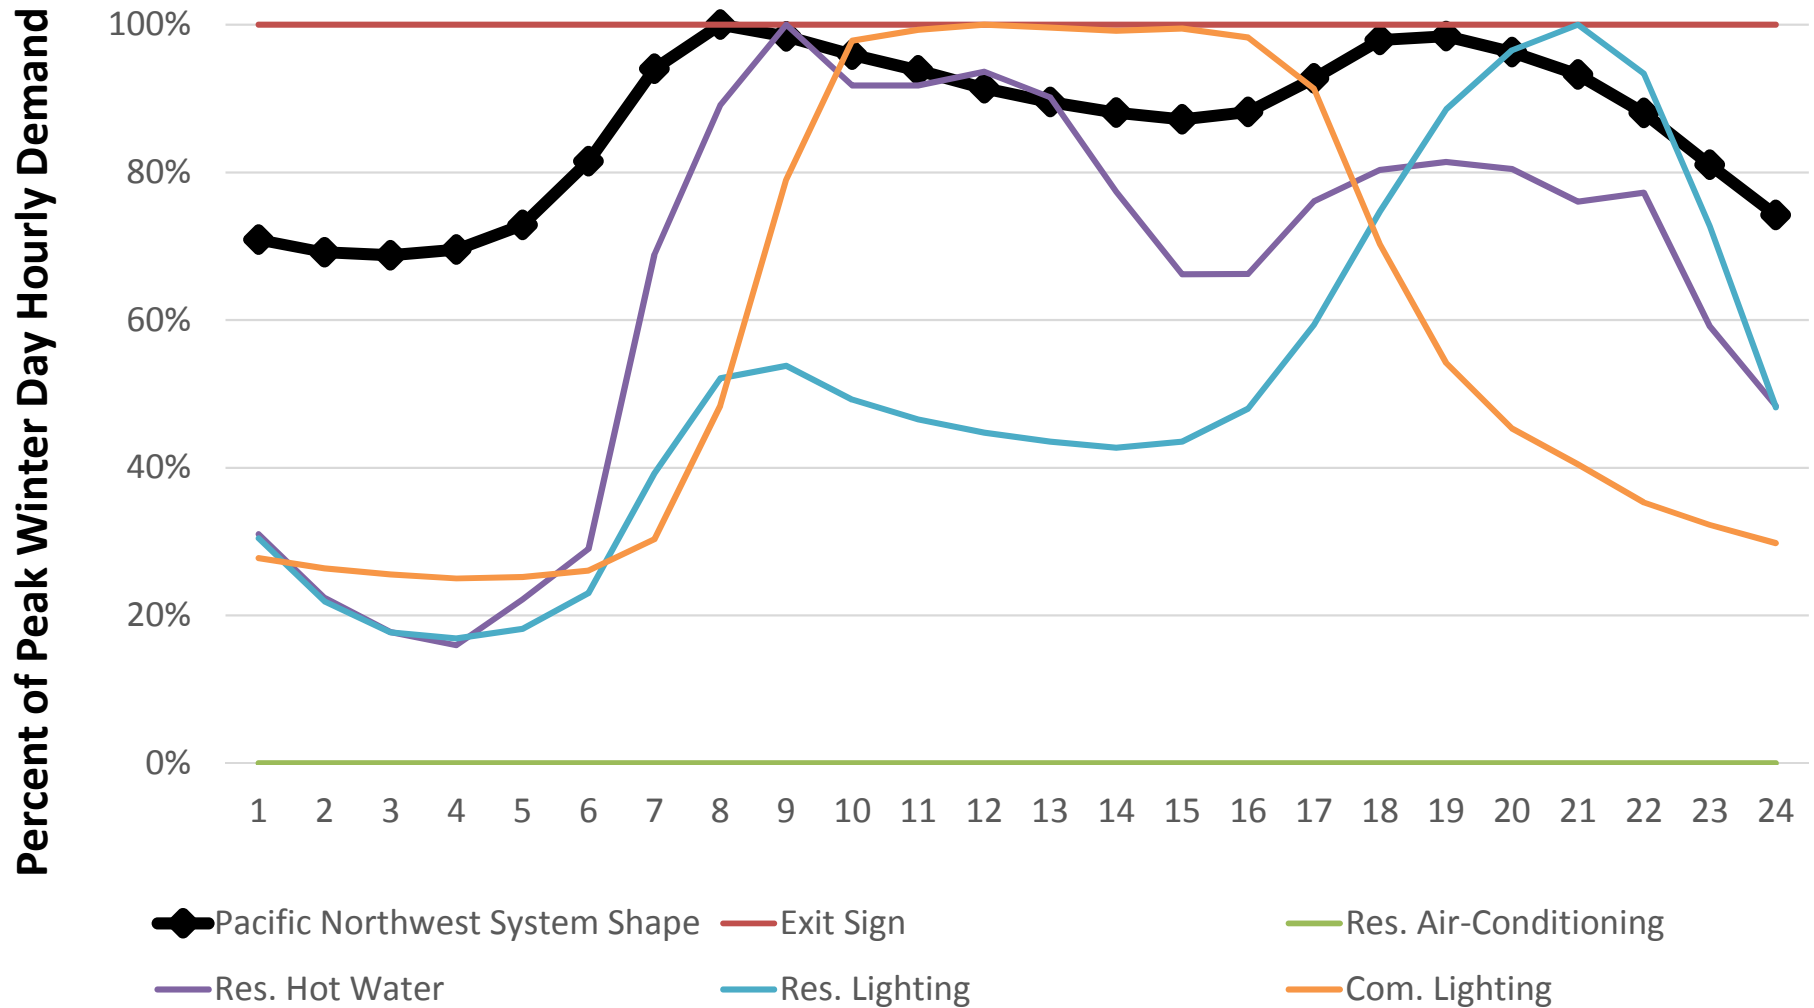


California System Shape and End-Use Load Shapes

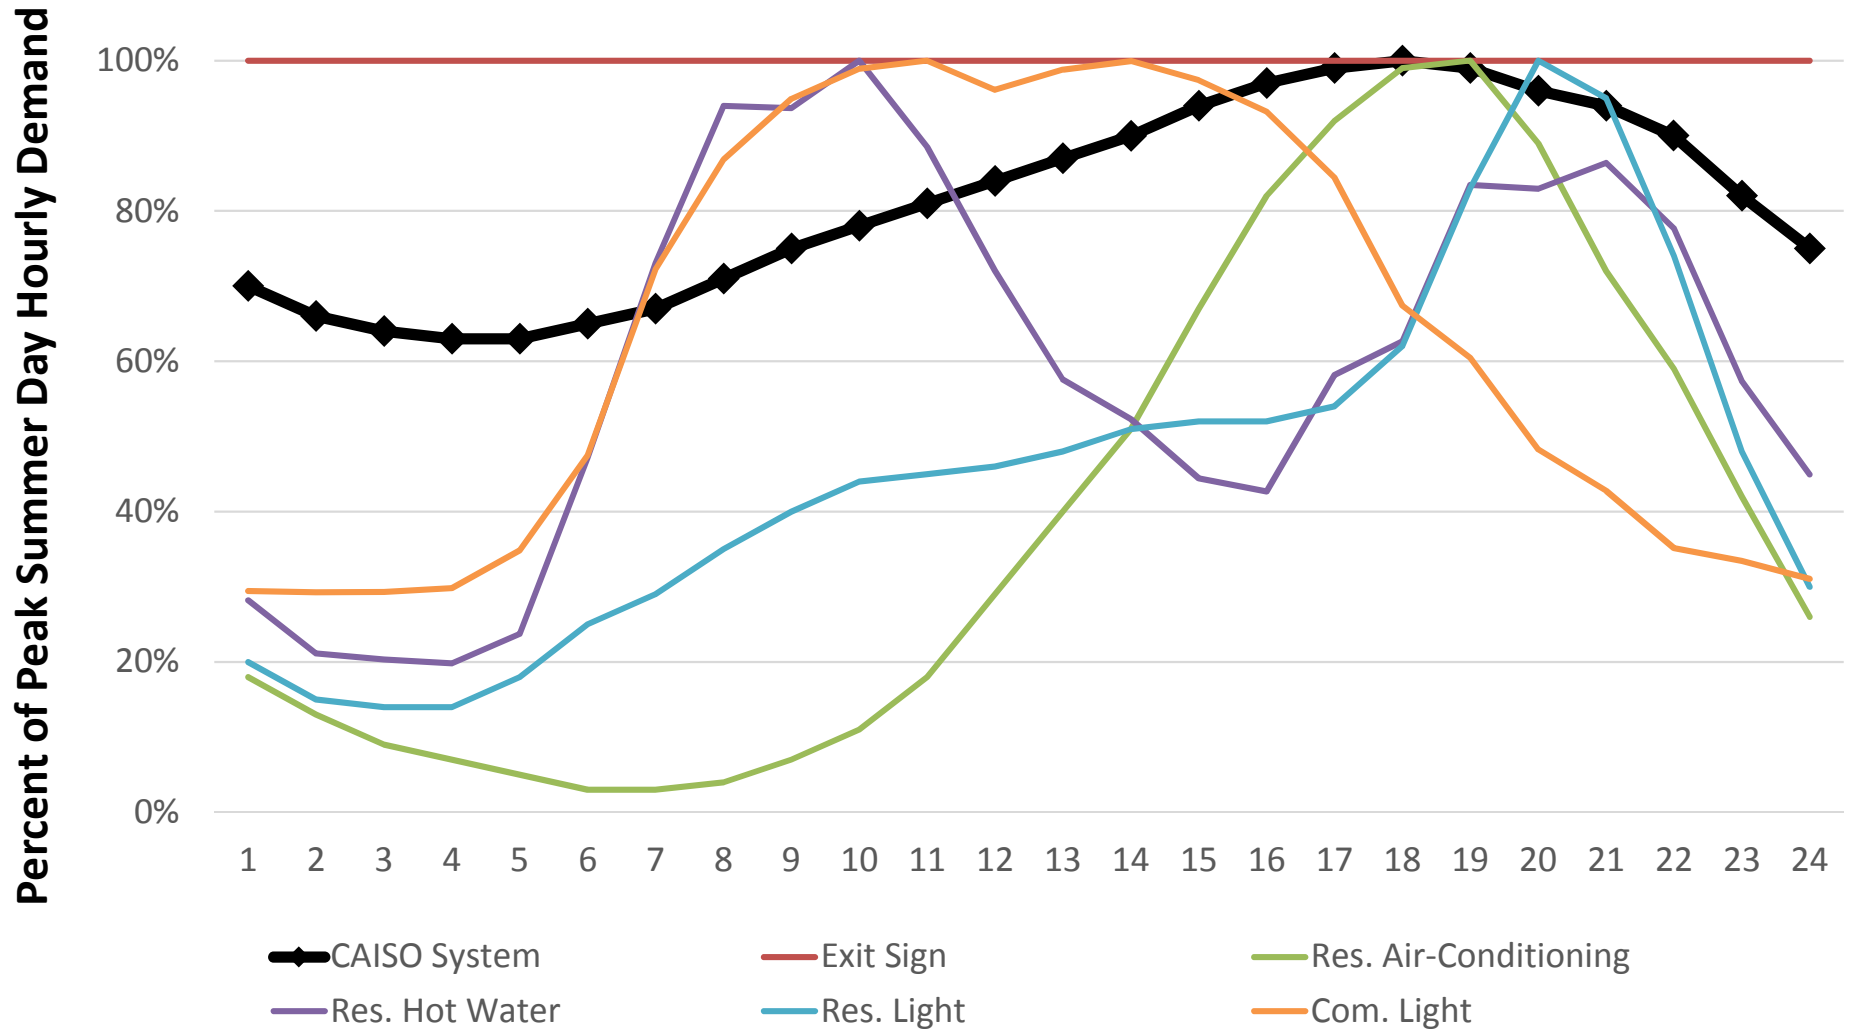


Massachusetts System Shape and End-Use Load Shapes

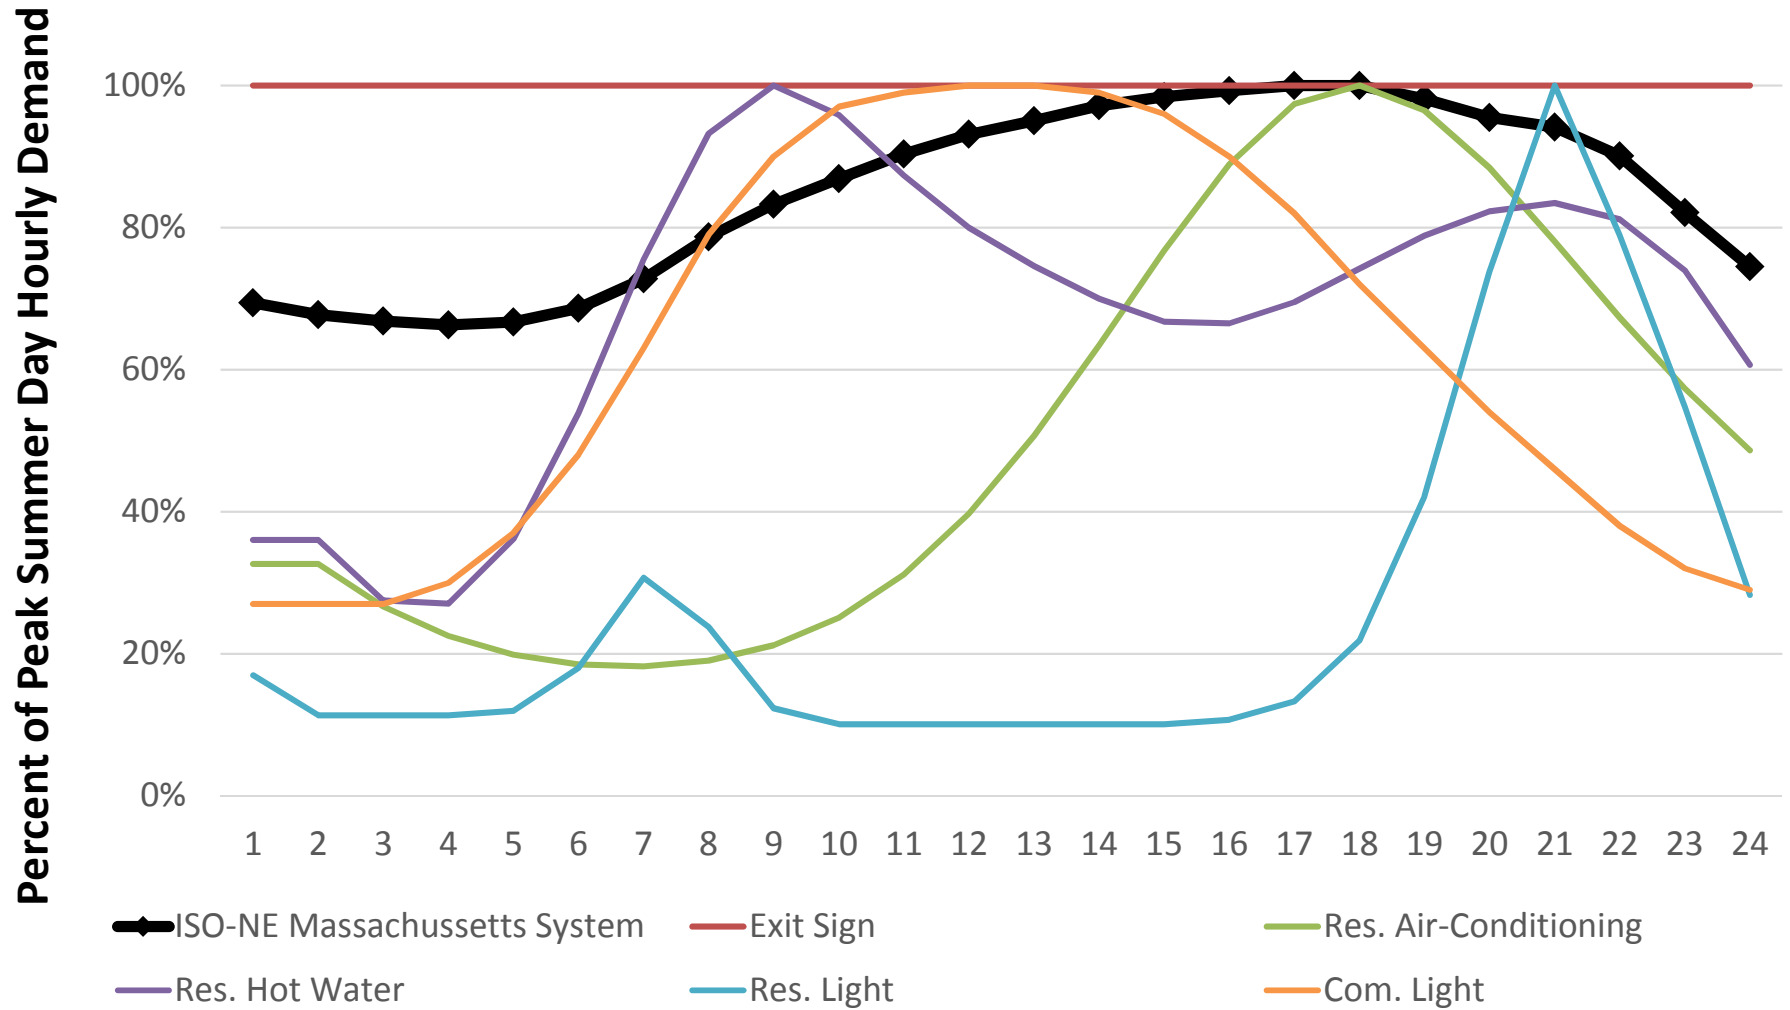

Georgia System Shape and End-Use Load Shapes

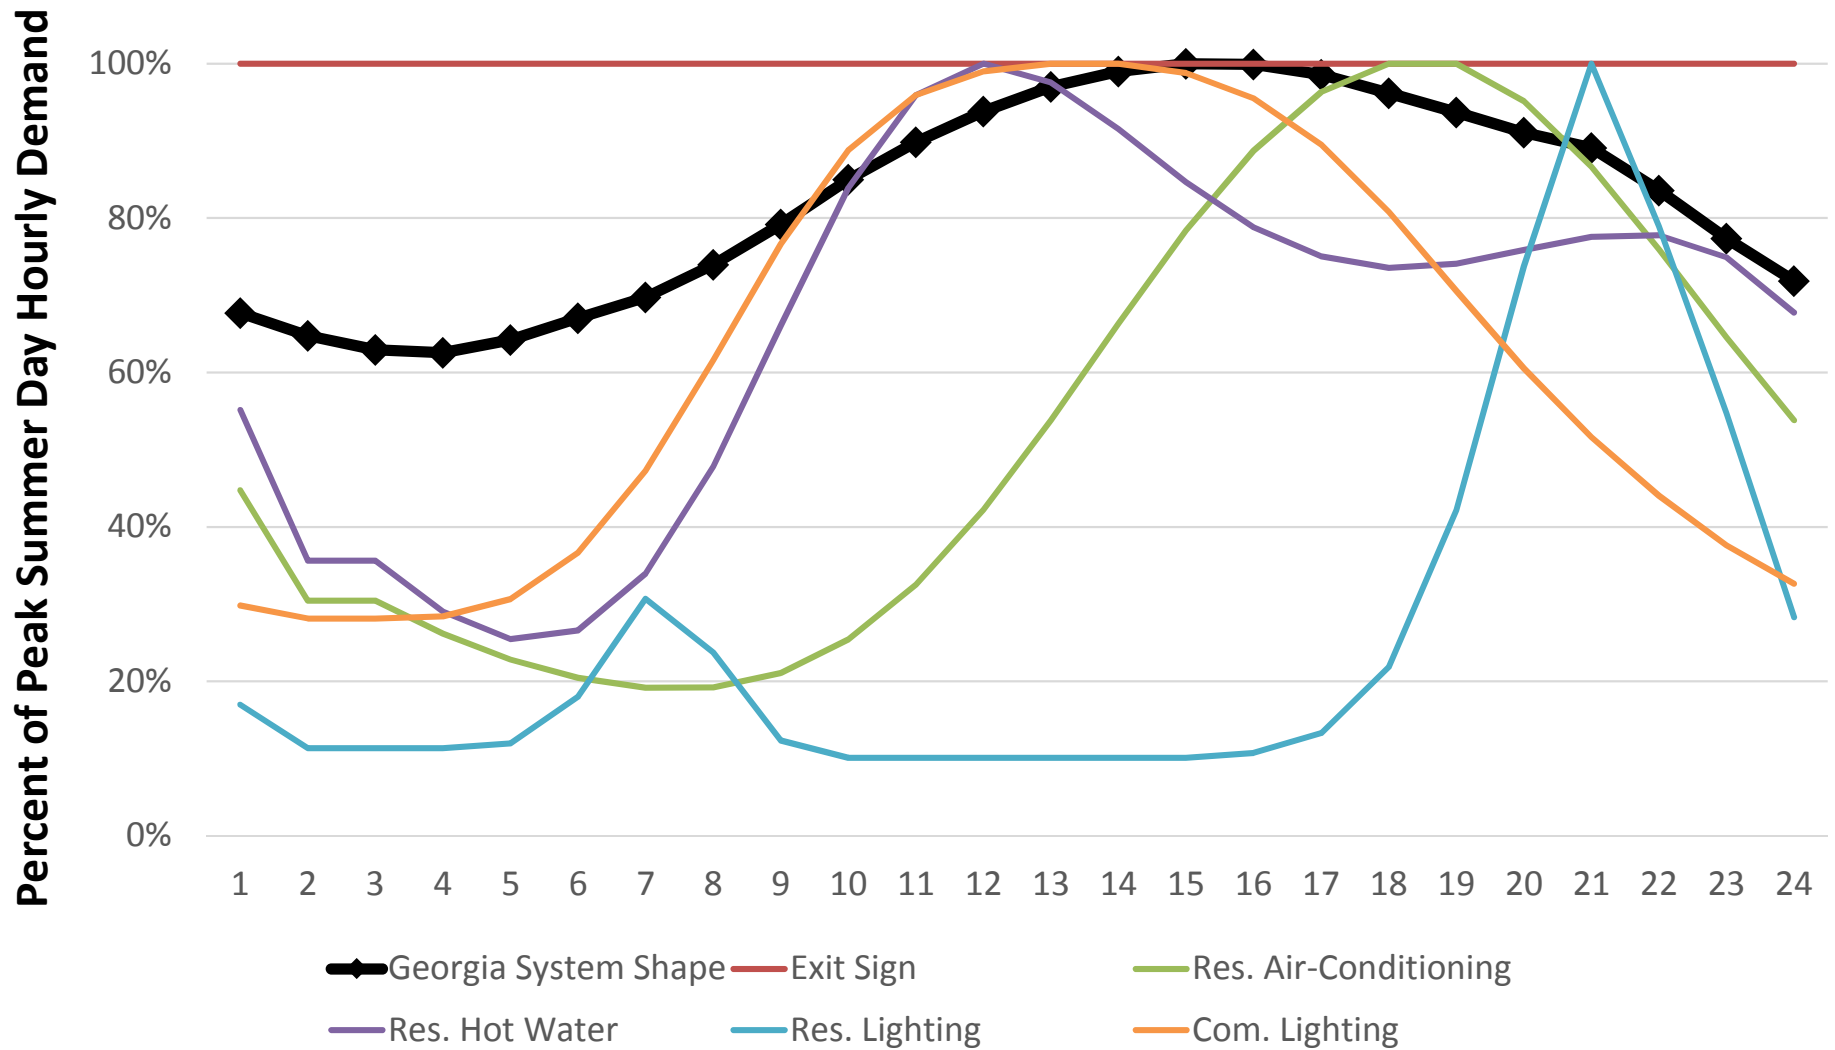

Comparing Total Utility System Value to Energy Value

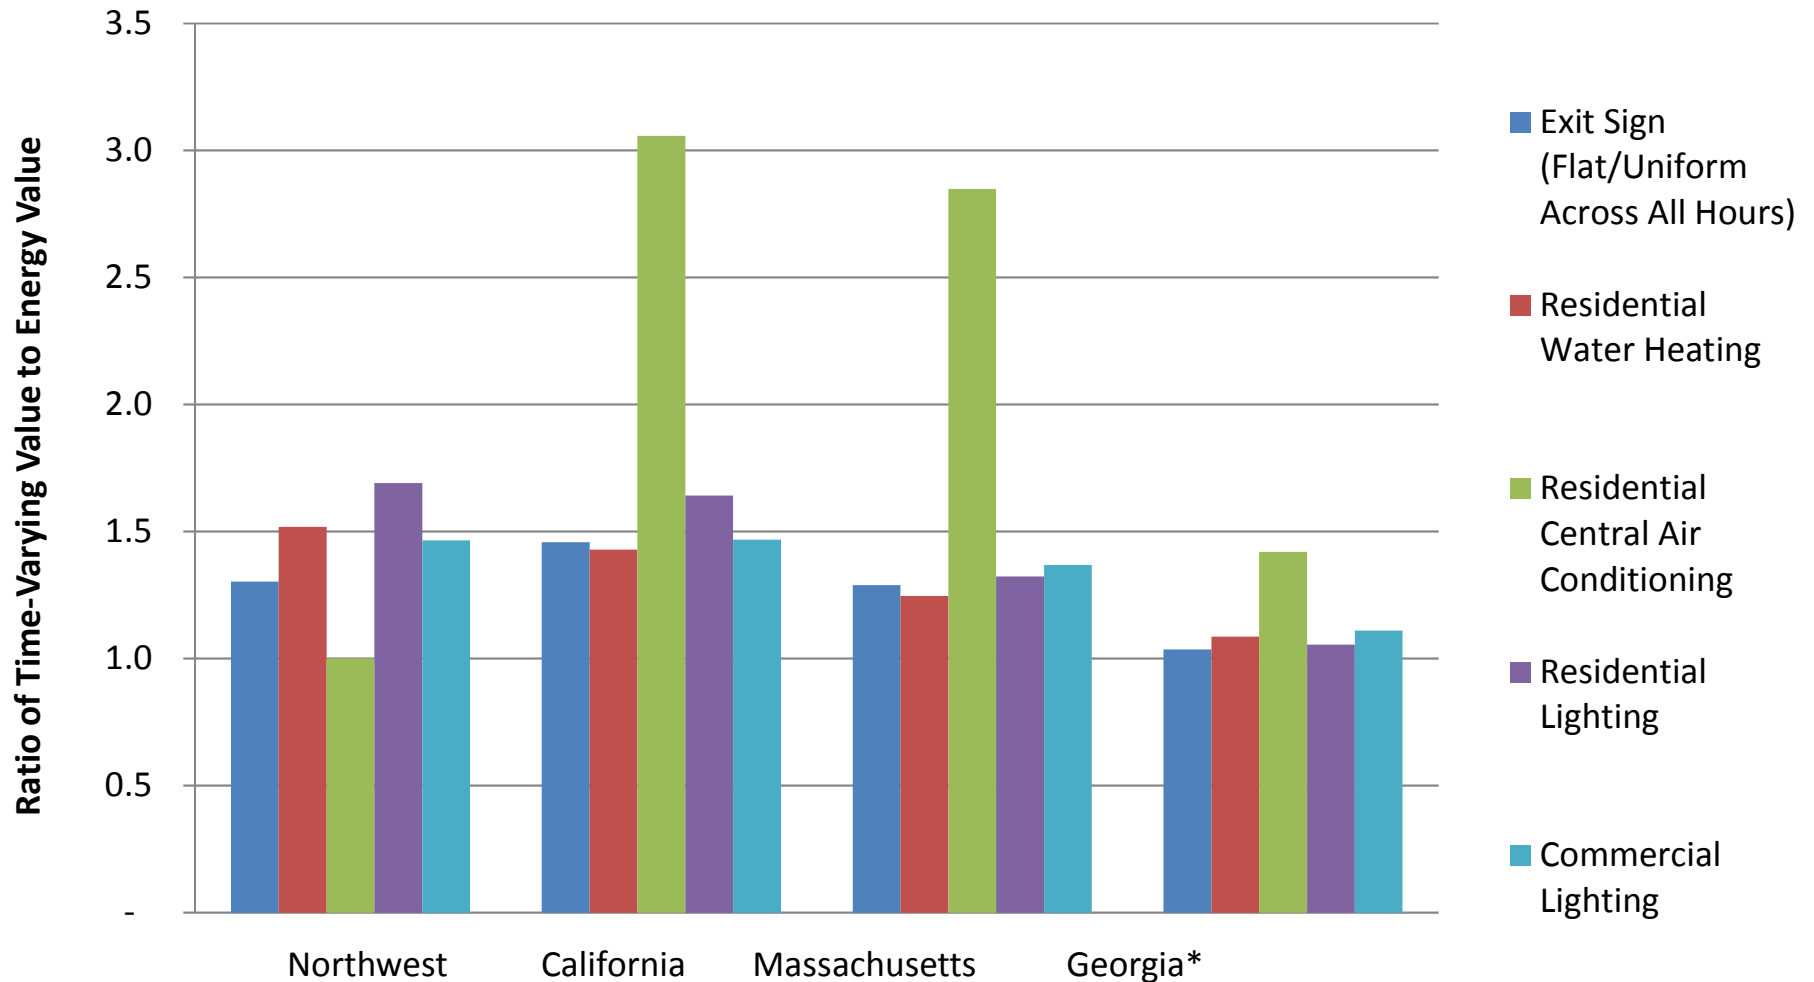


Notes: The flat load shape is an exit sign. Energy value includes: energy, risk, carbon dioxide emissions, avoided RPS and DRIPE, as applicable. Total time-varying value includes all energy values and capacity, transmission, distribution and spinning reserves. Ratios are calculated by dividing total time-varying values by energy-only values.

* In Georgia, where publicly available data did not include avoided transmission and distribution system values, the time-varying value of efficiency appears much lower for all measures evaluated. Avoided transmission and distribution costs are included in Georgia Power's energy efficiency evaluations, but are not a part of the publicly available PURPA avoided cost filing.

Exit Sign (flat load shape)


Measure 1 of 5

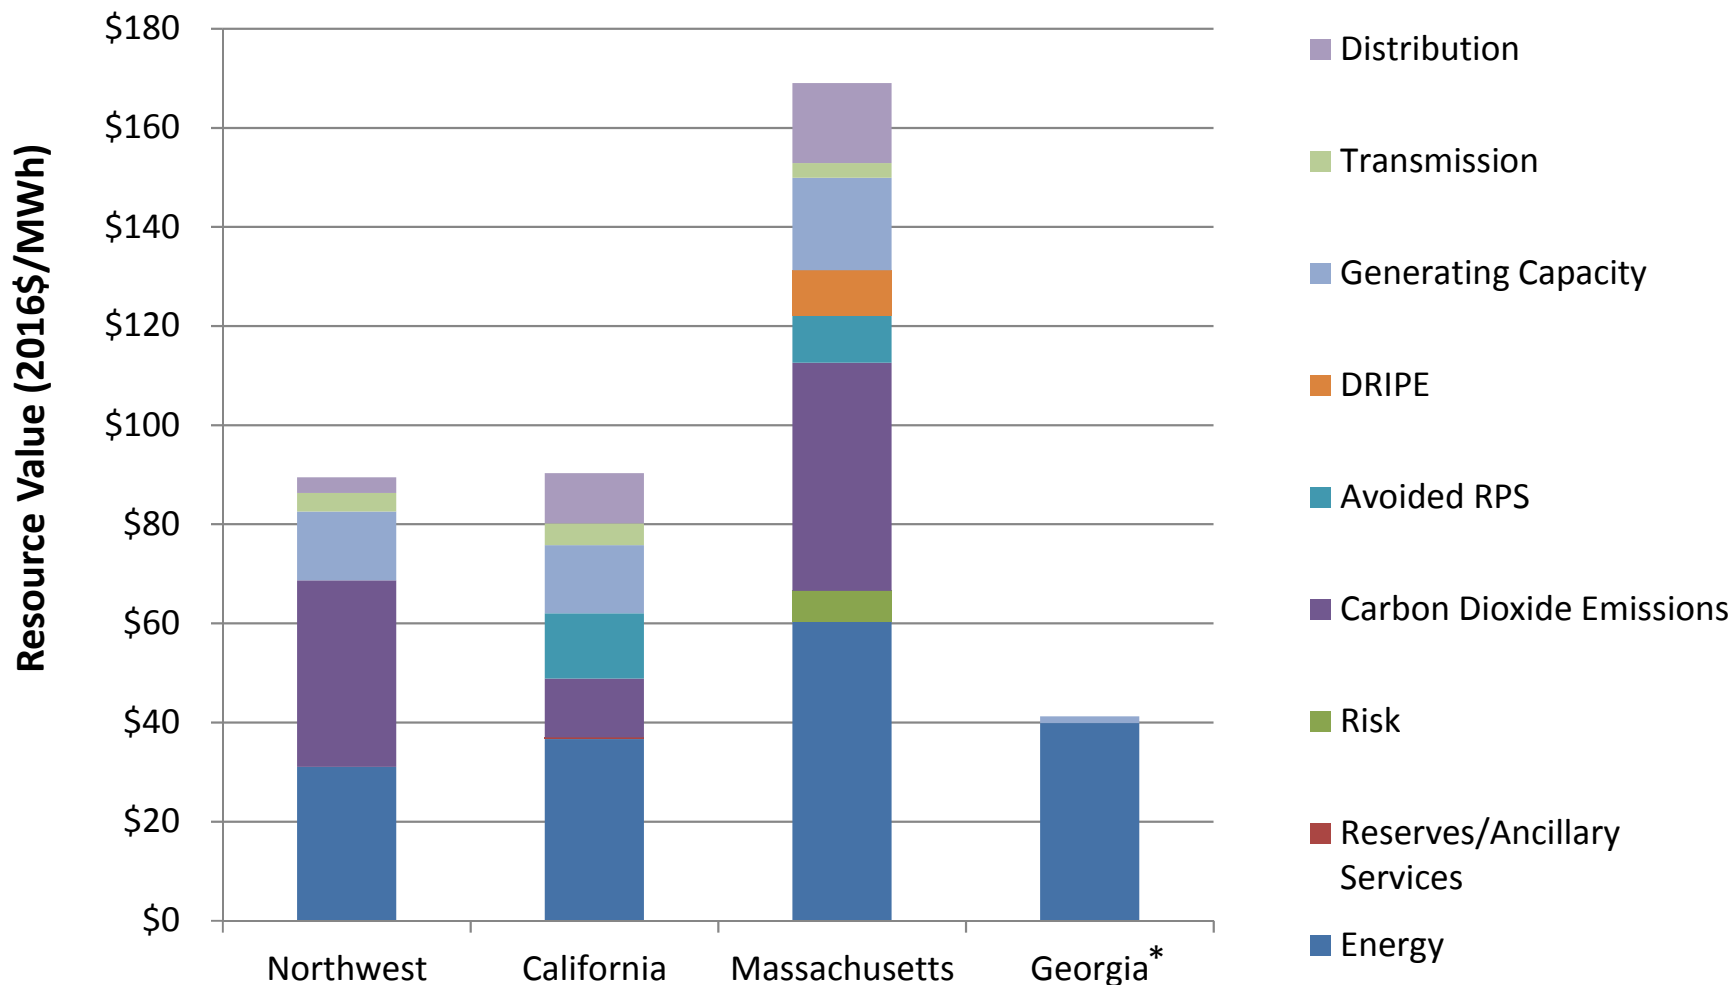

* In Georgia, where publicly available data did not include avoided transmission and distribution system values, the time-varying value of efficiency appears much lower for all measures evaluated. Avoided transmission and distribution costs are included in Georgia Power's energy efficiency evaluations, but are not a part of the publicly available PURPA avoided cost filing.

Residential Central Air-Conditioning


Measure 2 of 5

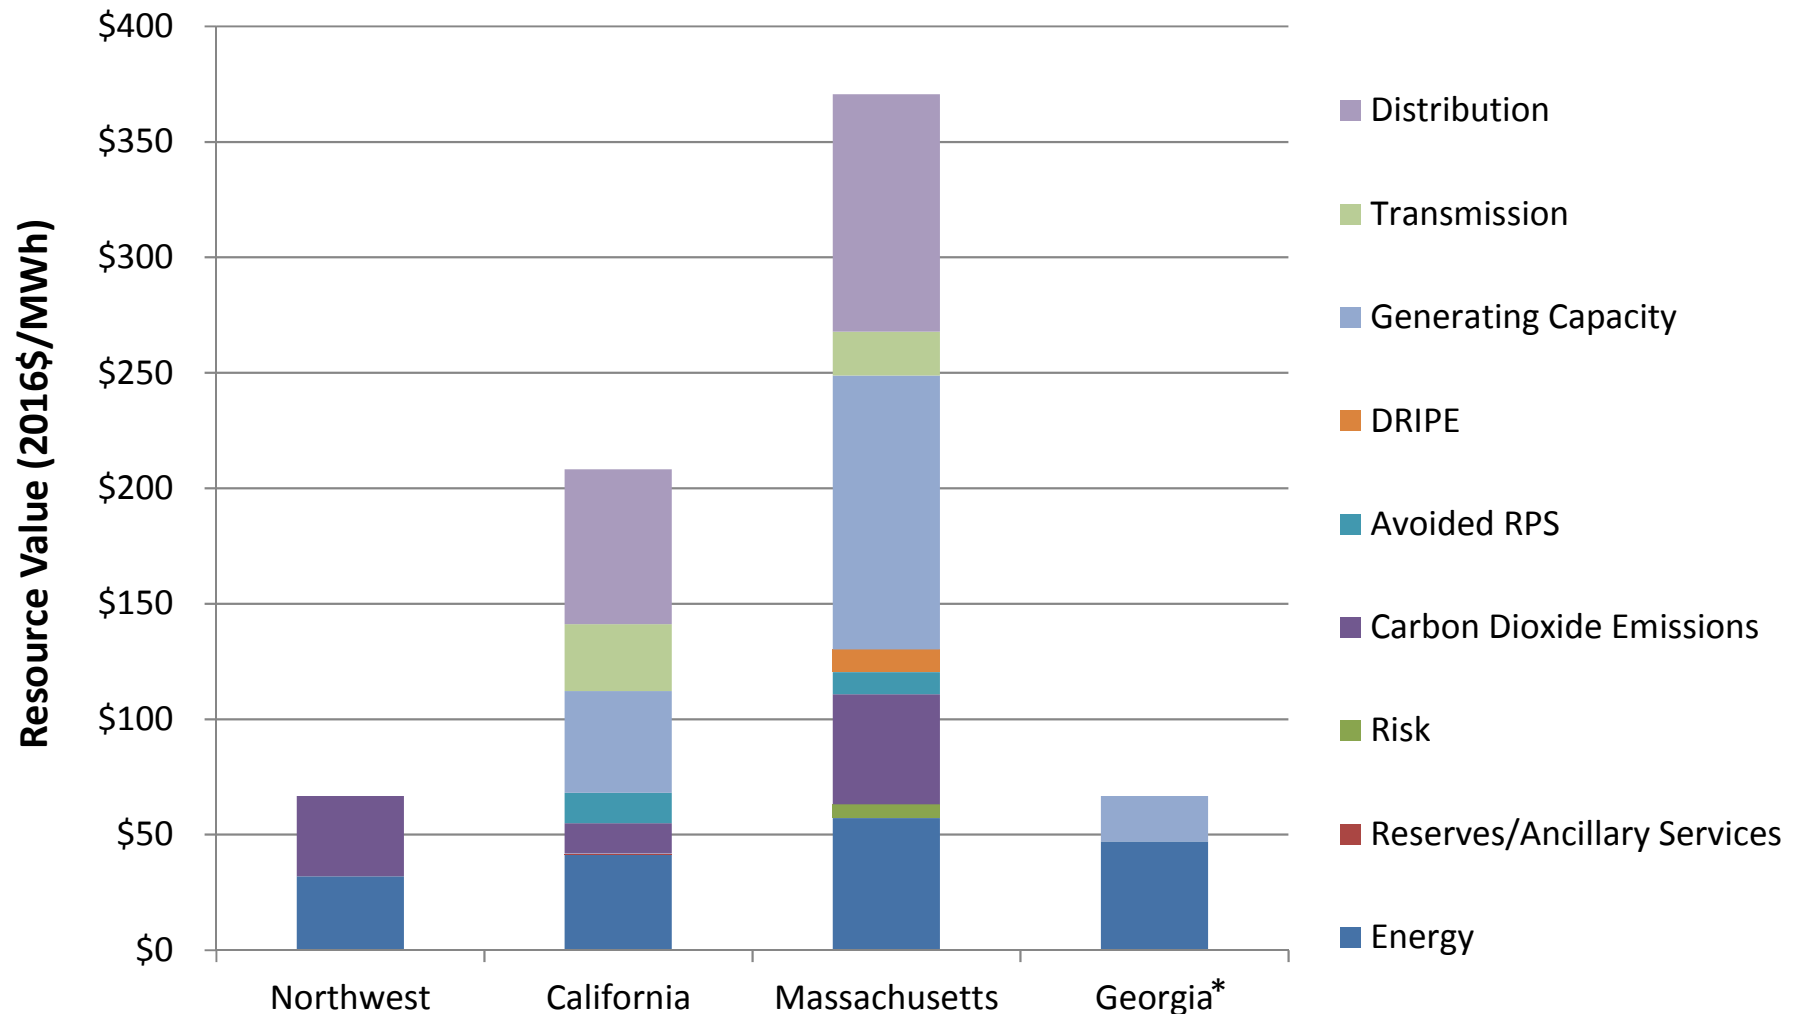

* In Georgia, where publicly available data did not include avoided transmission and distribution system values, the time-varying value of efficiency appears much lower for all measures evaluated. Avoided transmission and distribution costs are included in Georgia Power's energy efficiency evaluations, but are not a part of the publicly available PURPA avoided cost filing.

Residential Hot Water


Measure 3 of 5

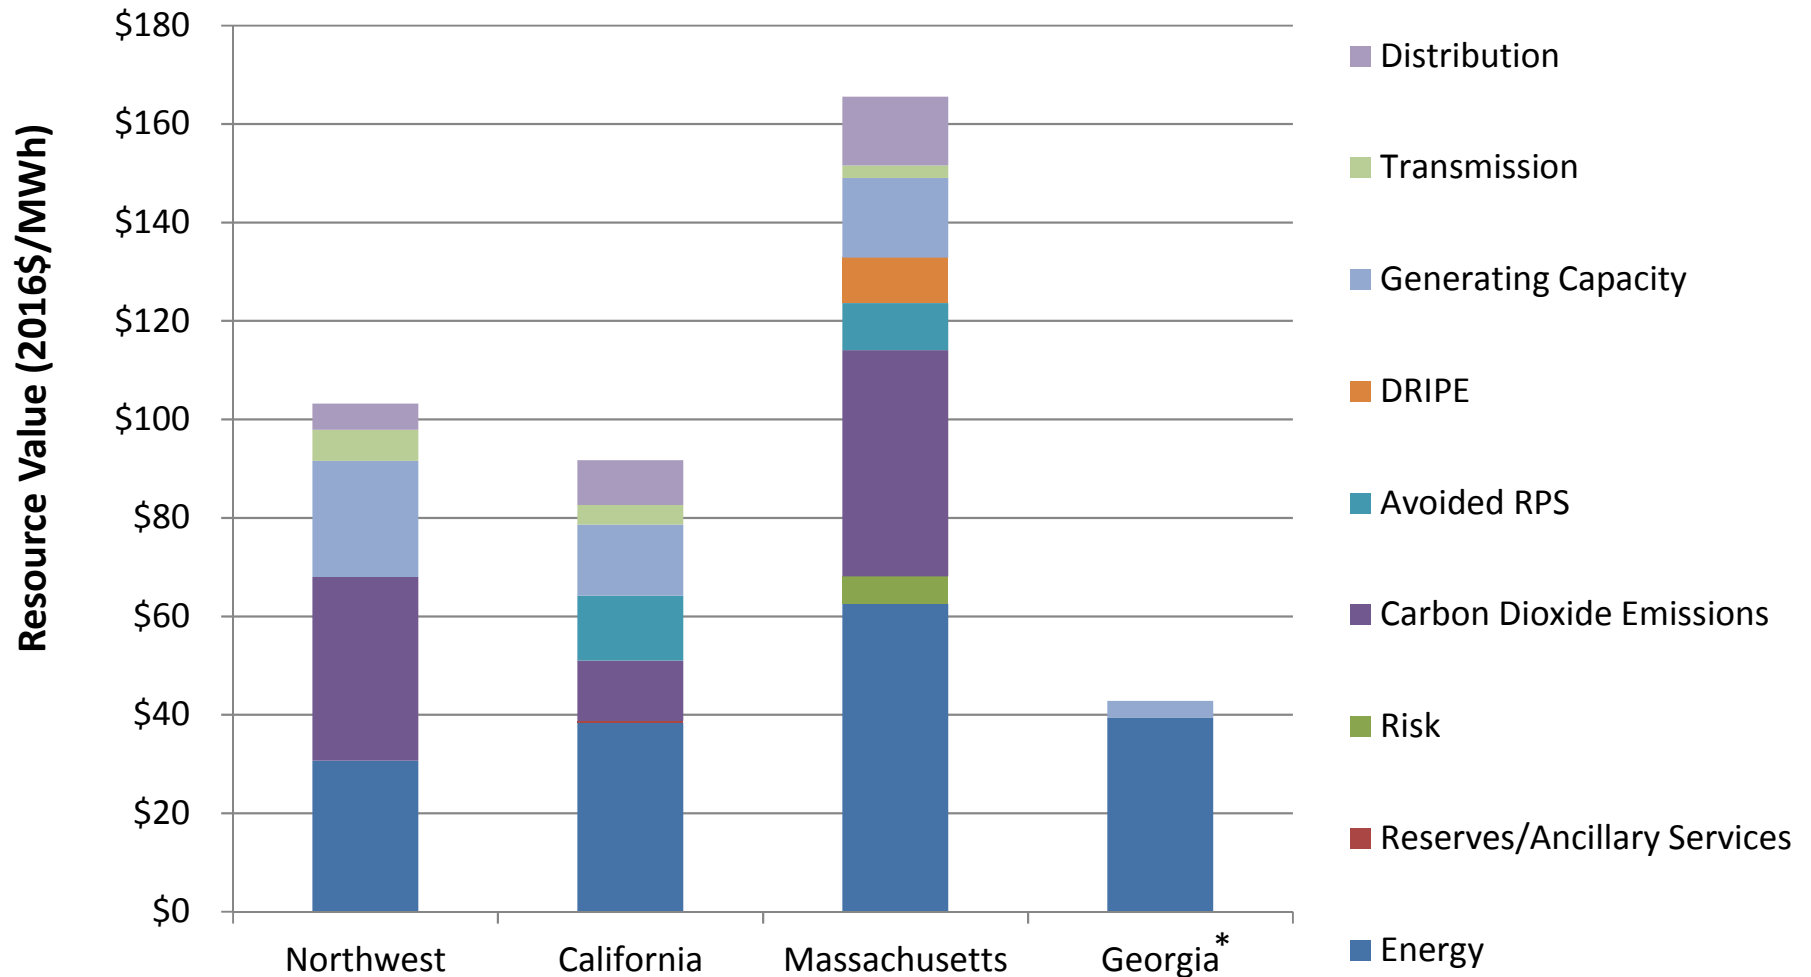

* In Georgia, where publicly available data did not include avoided transmission and distribution system values, the time-varying value of efficiency appears much lower for all measures evaluated. Avoided transmission and distribution costs are included in Georgia Power's energy efficiency evaluations, but are not a part of the publicly available PURPA avoided cost filing.

Residential Lighting


Measure 4 of 5

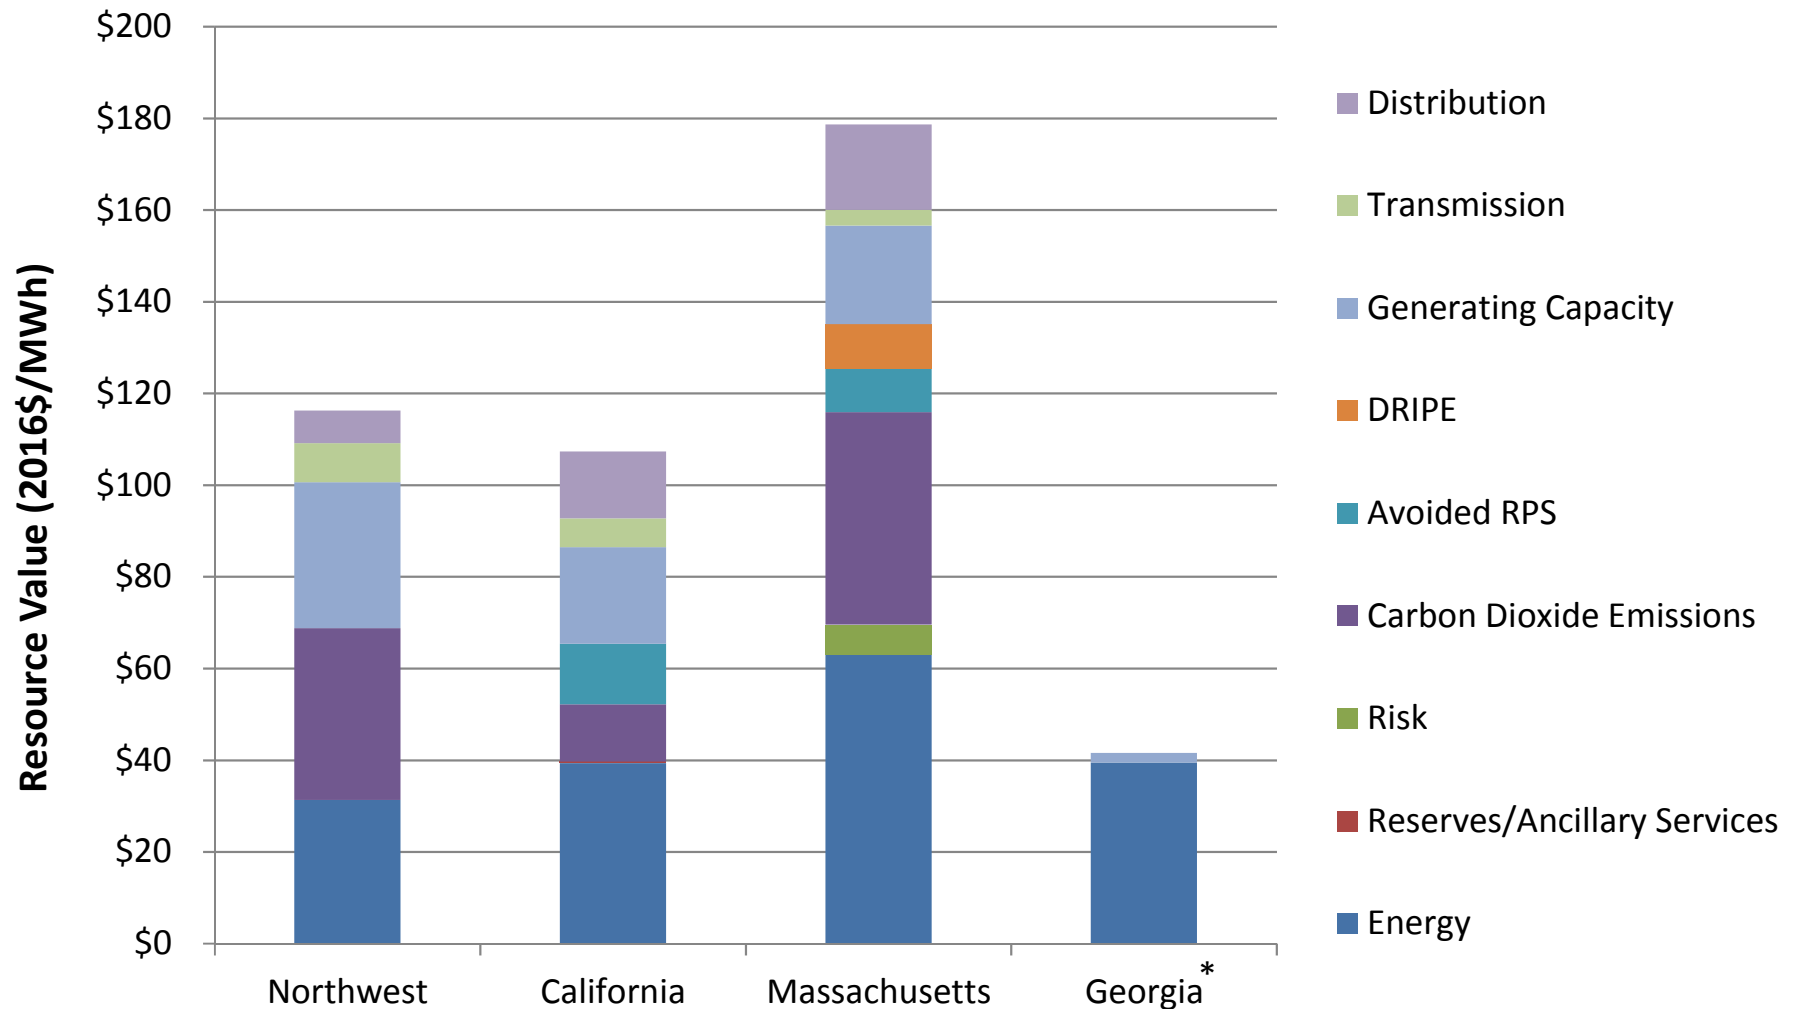

* In Georgia, where publicly available data did not include avoided transmission and distribution system values, the time-varying value of efficiency appears much lower for all measures evaluated. Avoided transmission and distribution costs are included in Georgia Power's energy efficiency evaluations, but are not a part of the publicly available PURPA avoided cost filing.

Commercial Lighting

Measure 5 of 5

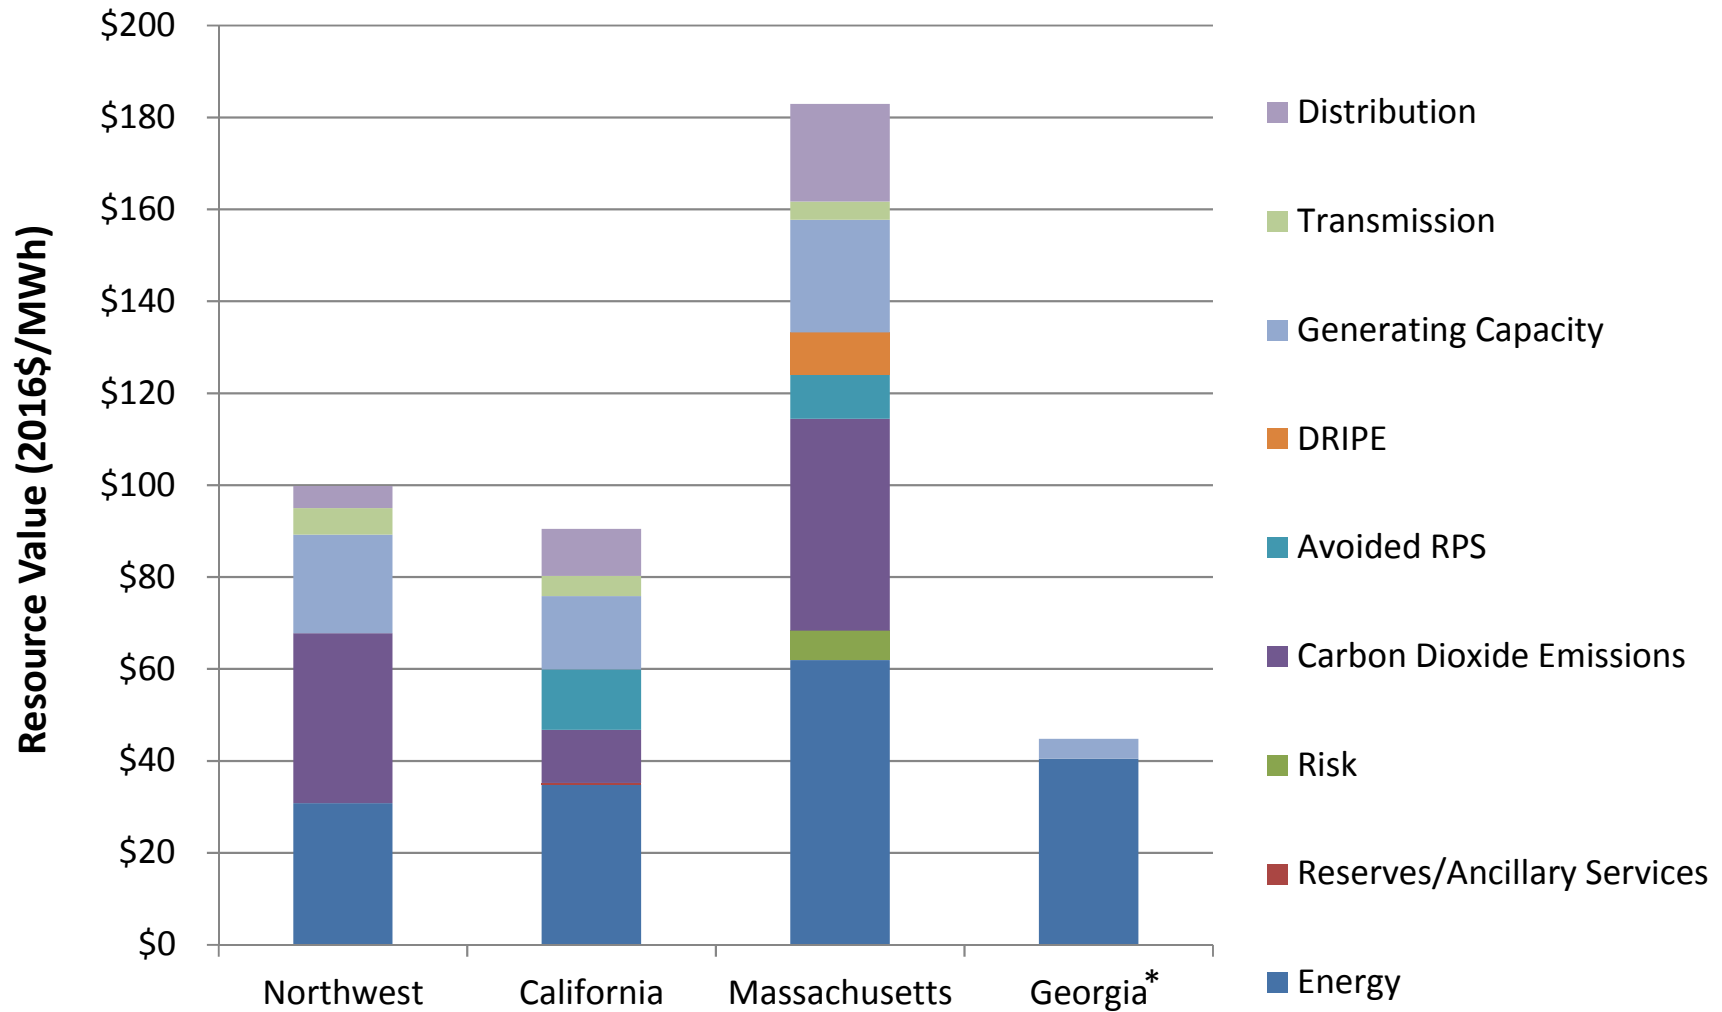

* In Georgia, where publicly available data did not include avoided transmission and distribution system values, the time-varying value of efficiency appears much lower for all measures evaluated. Avoided transmission and distribution costs are included in Georgia Power's energy efficiency evaluations, but are not a part of the publicly available PURPA avoided cost filing.

Conclusions

- ◆ Electric energy efficiency resources save energy and may reduce peak demand.
- ◆ The time-varying value of energy efficiency measures varies across the locations studied because of physical and operational characteristics of the individual utility system, the time periods that the savings from measures occur and differences in the value and components of avoided cost considered.
- ◆ Across the four locations studied, some of the largest capacity benefits from energy efficiency are derived from the deferral of transmission and distribution system infrastructure upgrades. However, the deferred cost of transmission and distribution infrastructure upgrades also exhibited the greatest range in value of all the components of avoided cost across the locations studied.
- ◆ Of the five measures studied, residential air-conditioning has the most significant added value when the total time-varying value is considered in summer peaking systems.

Conclusions (cont'd)

- ◆ The increased use of distributed energy resources and the addition of major new electricity consuming end-uses are anticipated to significantly alter the load shape of many utility systems in the future.
- ◆ Data used to estimate the impact of energy efficiency measures on electric system peak demands will need to be updated periodically to accurately reflect the value of savings as system load shapes change.
- ◆ Publicly available components of electric system costs avoided through energy efficiency are not uniform across states and utilities. Inclusion or exclusion of these components and differences in their value affect estimates of the time-varying value of efficiency.
- ◆ Publicly available data on end-use load and energy savings shapes are limited, concentrated regionally, and should be expanded.

Utility, State or Regional Recommendations

- ◆ Collect metered data on a variety of end-use load and energy savings shapes for the state or region at least at the hourly level and make the data publicly available in a format that can be readily used in planning processes.
- ◆ Account for variations in the calculation of time-varying value of energy savings and avoided costs.
- ◆ Periodically update estimates of the impact of energy efficiency measures on utility system peak demands to accurately reflect changing system load shapes.
- ◆ Study transferability of end-use load shapes from one climate zone to another climate zone.

Regional or National Recommendations

- ◆ Identify best practices for establishing the time-varying value of energy efficiency in integrated resource planning and demand-side management planning to ensure investment in a least-cost, reliable electric system.
- ◆ Establish protocols for consistent methods and procedures for developing end-use load shapes and load shapes of efficiency measures.
- ◆ Establish common methods for assessing the time-varying value of energy savings, including values that are often missing such as deferred or avoided T&D investments.



Energy Technologies Area

Lawrence Berkeley National Laboratory

Natalie Mims

namims@lbl.gov

510-486-7584

Tom Eckman

teckman49@gmail.com

503-803-5047

Chuck Goldman

cagoldman@lbl.gov

510-486-4637

Lisa Schwartz

lcschwartz@lbl.gov

510-486-6315

Visit our website at: <http://emp.lbl.gov/>

Click [here](#) to join the LBNL Electricity Markets and Policy Group mailing list and stay up to date on our publications, webinars and other events. Follow the Electricity Markets & Policy Group on Twitter @BerkeleyLabEMP



Energy Technologies Area

Lawrence Berkeley National Laboratory

Time-Varying Value of Energy Efficiency

Natalie Mims, Tom Eckman and Chuck Goldman

July 10, 2017

This work was supported by the DOE Office of Energy Efficiency & Renewable Energy Building Technologies Office under Lawrence Berkeley National Laboratory Contract No. DE-AC02-05CH11231.

Project Objective and Scope

- ◆ Advance consideration of the value of demand-side energy efficiency measures during times of peak electricity demand and high electricity prices through quantitative examples of the value of energy efficiency at times of system peak
- ◆ Increase awareness of available end-use load research and its application to time-varying valuation of energy efficiency
- ◆ Increase awareness of the gaps in, and need for, research on energy savings shape
- ◆ Recommend methodology(ies) to appropriately value energy efficiency for meeting peak demand
- ◆ Consider changes to efficiency valuation methodologies to address the changing shape of net load (total electric demand in the system minus wind and solar)

Study Approach

- Summarize state of end-use load research and existing analyses that quantify benefits of electric efficiency measures and programs during peak demand and high electricity prices
- Document time-varying energy and demand impacts of 5 measures in 4 locations:

Measures

- ❑ Exit sign (Flat load shape)
- ❑ Commercial lighting
- ❑ Residential lighting
- ❑ Residential water heater
- ❑ Residential air conditioning

State/Region


- ❑ Pacific Northwest
- ❑ California
- ❑ Massachusetts
- ❑ Georgia

- Use publicly available avoided costs from each location and one of the following methodologies:
 1. Use seasonal system peaks, coincidence factors and diversity factors to determine peak/off-peak savings and apply seasonal avoided costs to savings, *or*
 2. Apply hourly avoided costs to each measure load shape to calculate the time-varying value of measure.


End-use Load Shapes and Energy Savings Shapes

- ◆ Definitions:
 - **End-use load shape:** Hourly consumption of an end-use (e.g., residential lighting, commercial HVAC) over the course of one year.
 - **Energy savings shape:** The difference between the hourly use of electricity in the baseline condition and the hourly use post-installation of the energy efficiency measure (e.g., the difference between the hourly consumption of an electric resistance water heater and a heat pump water heater) over the course of one year.
- ◆ The time pattern of savings from the substitution of a more efficient technology does not always mimic the underlying end-use.
- ◆ Examples:
 - Controls can reduce hours of operation (e.g., occupancy sensor or changing duty cycle), resulting in the shape of savings being different than the underlying end-use.
 - Improved end-use technology and controls (daylighting controls, sensors and software to power down computers when not in use)


End Use vs. Energy Savings Load Shapes

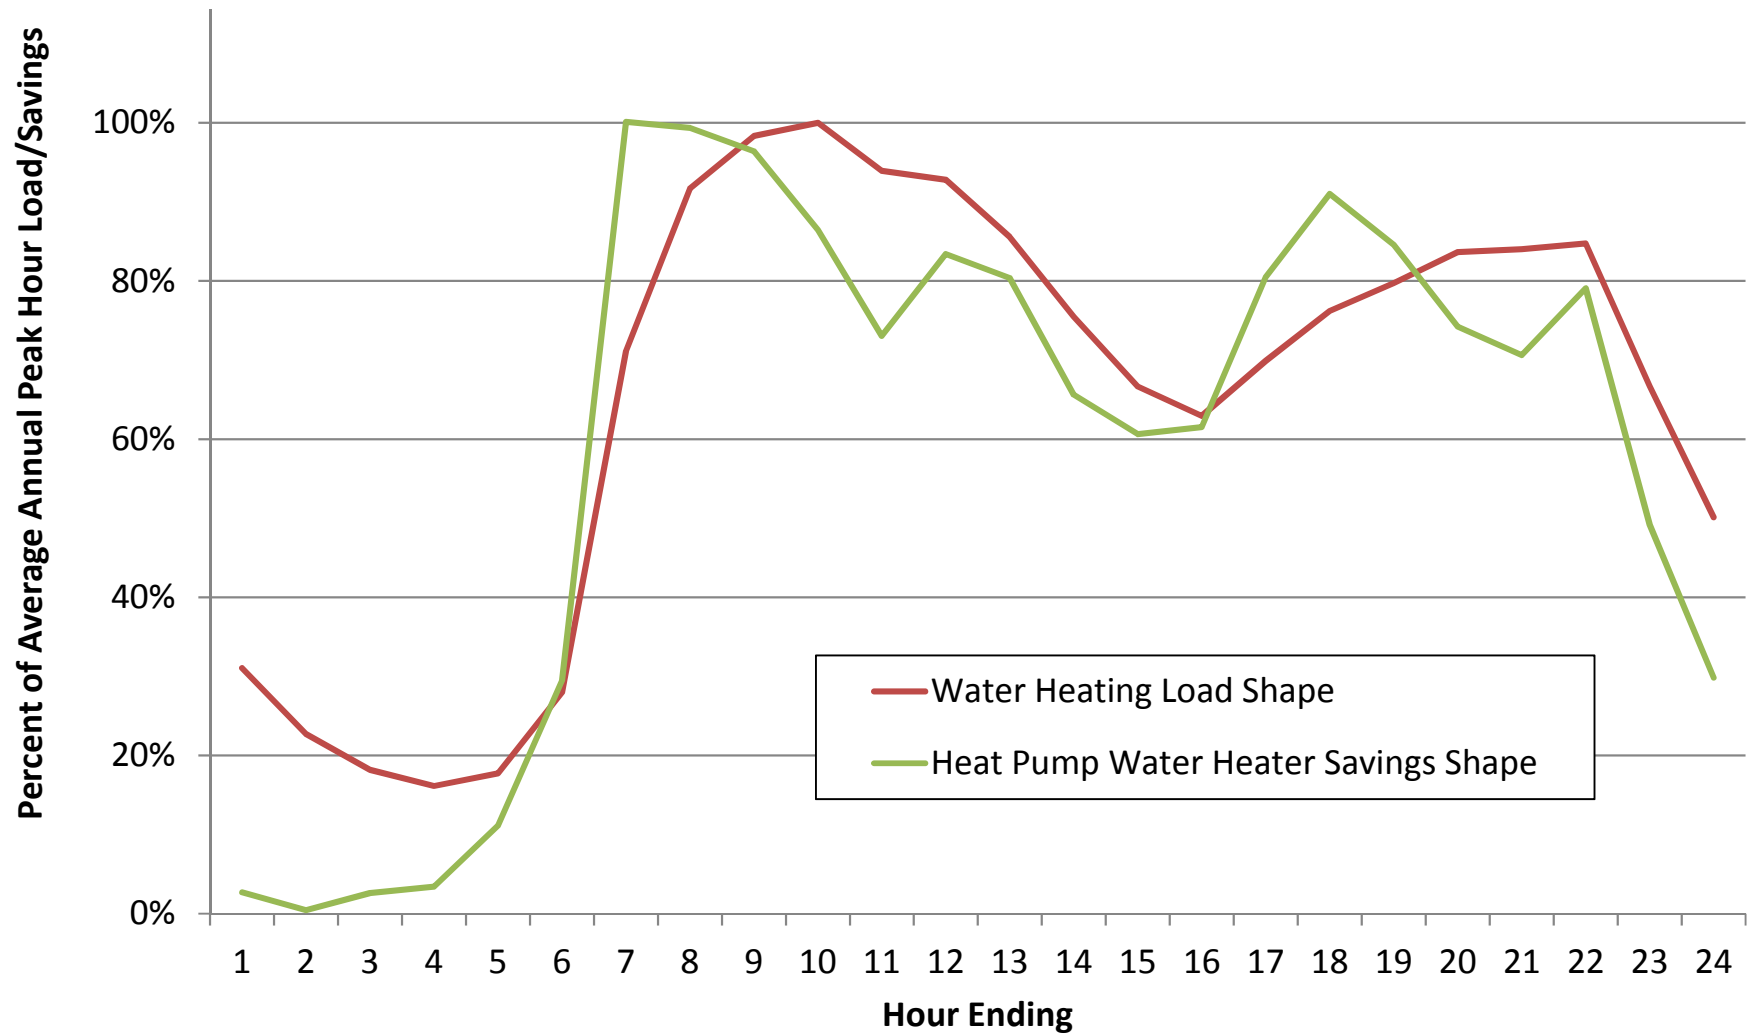


2016 System Load Shapes

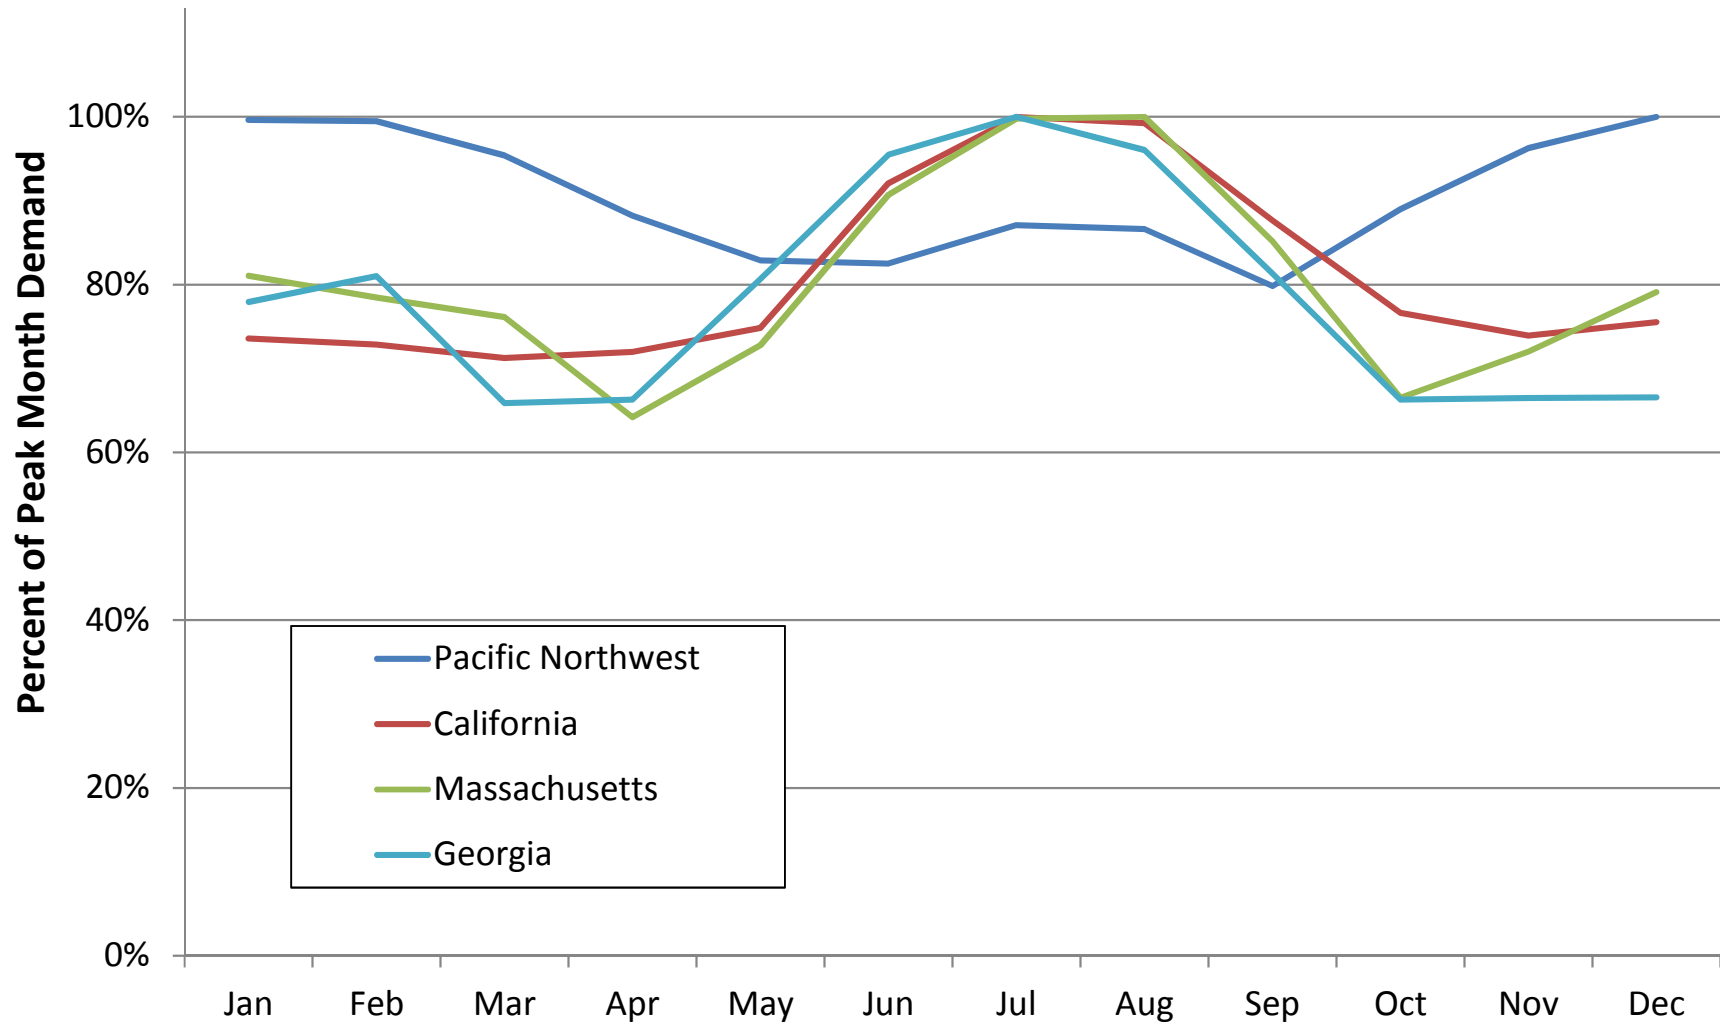


Pacific Northwest System Shapes and End-Use Load Shapes

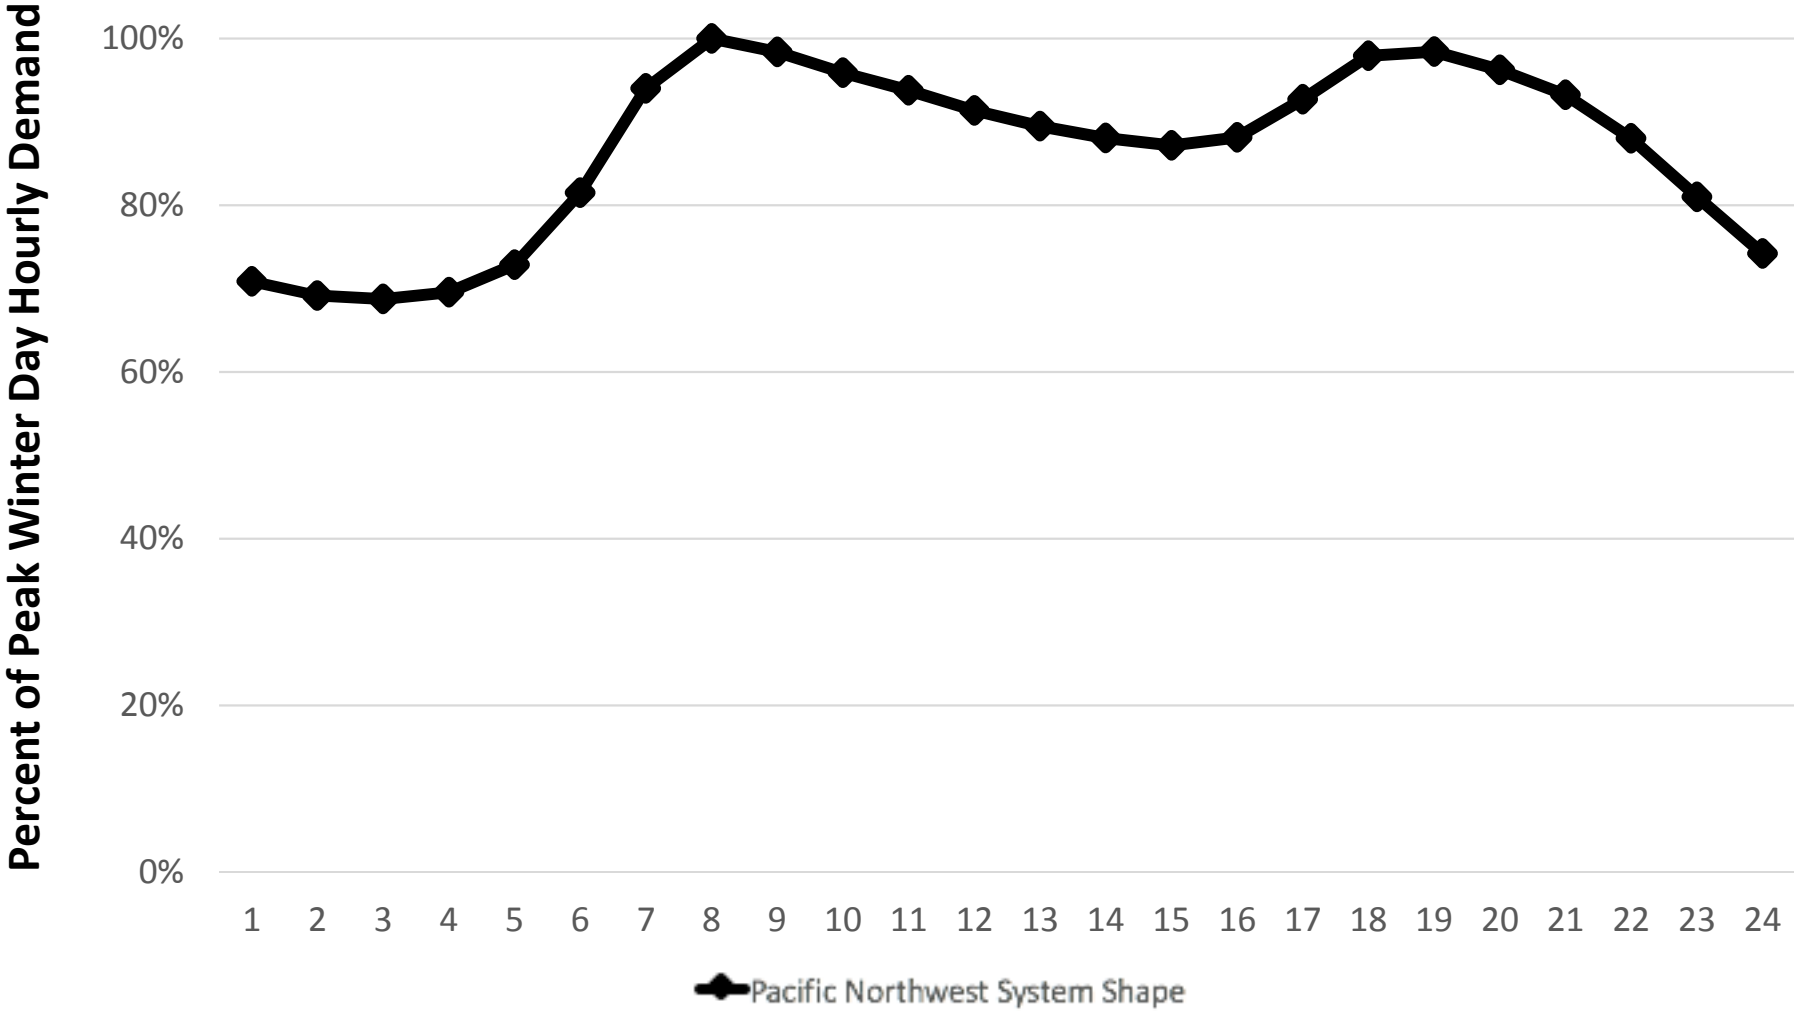


Pacific Northwest System Shapes and End-Use Load Shapes

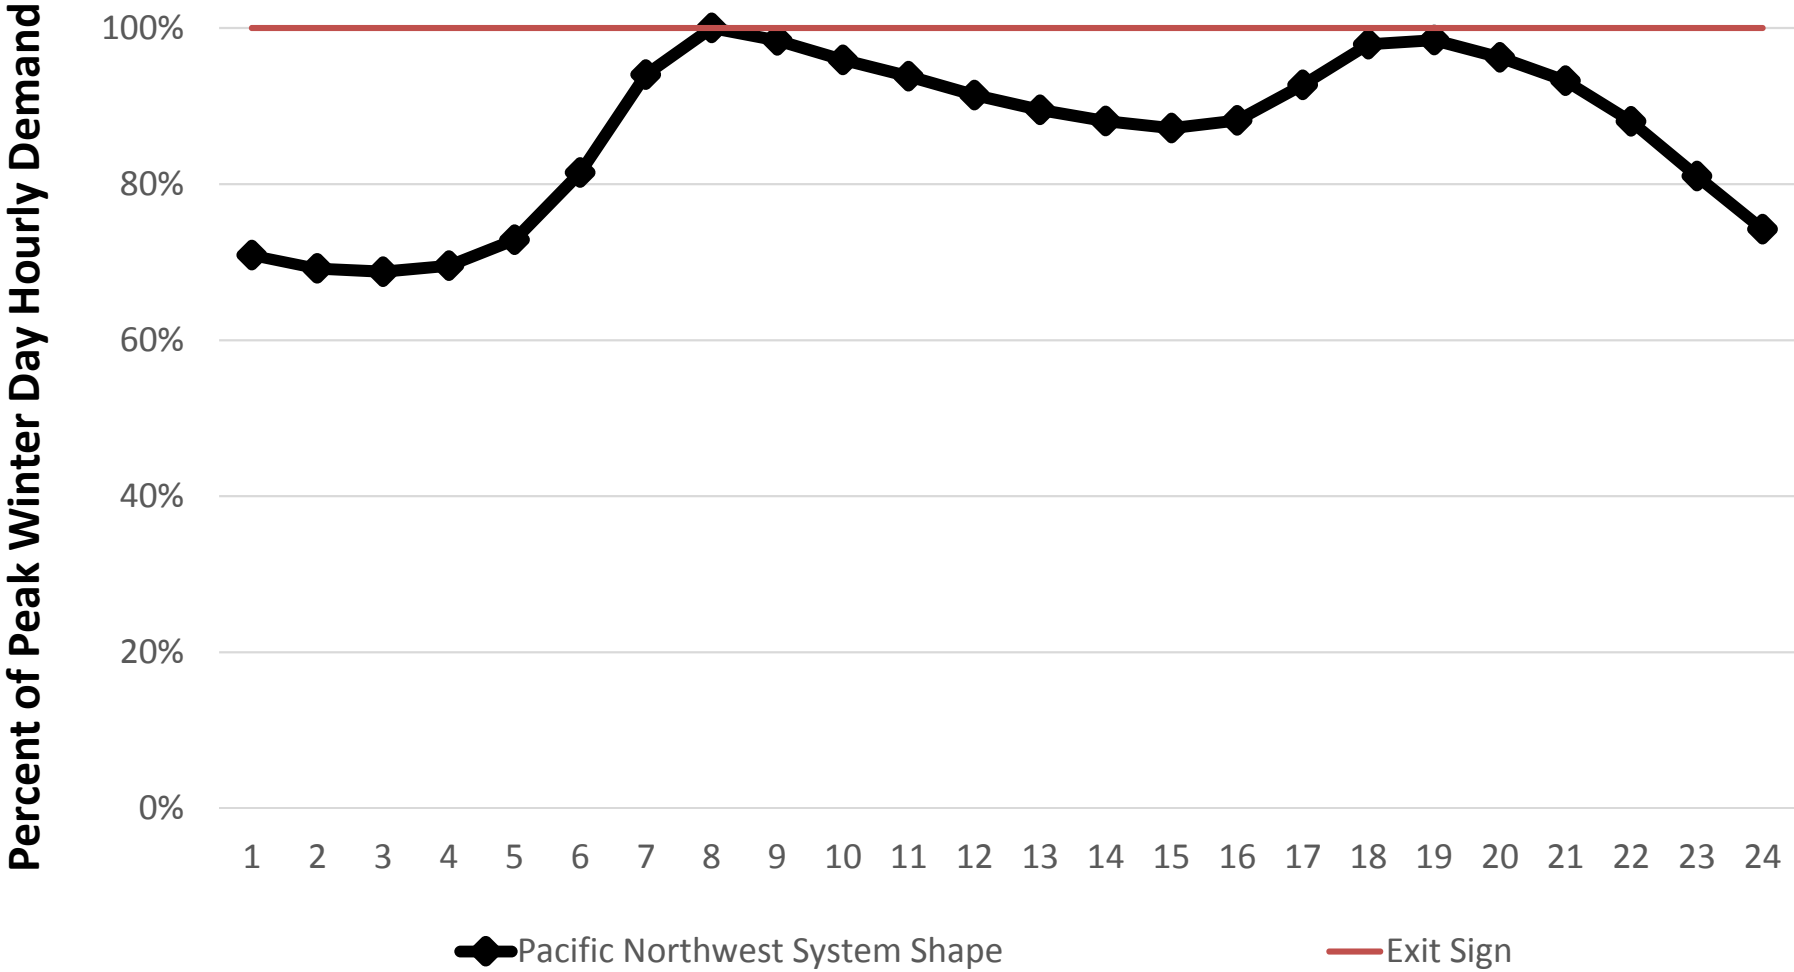


Pacific Northwest System Shapes and End-Use Load Shapes

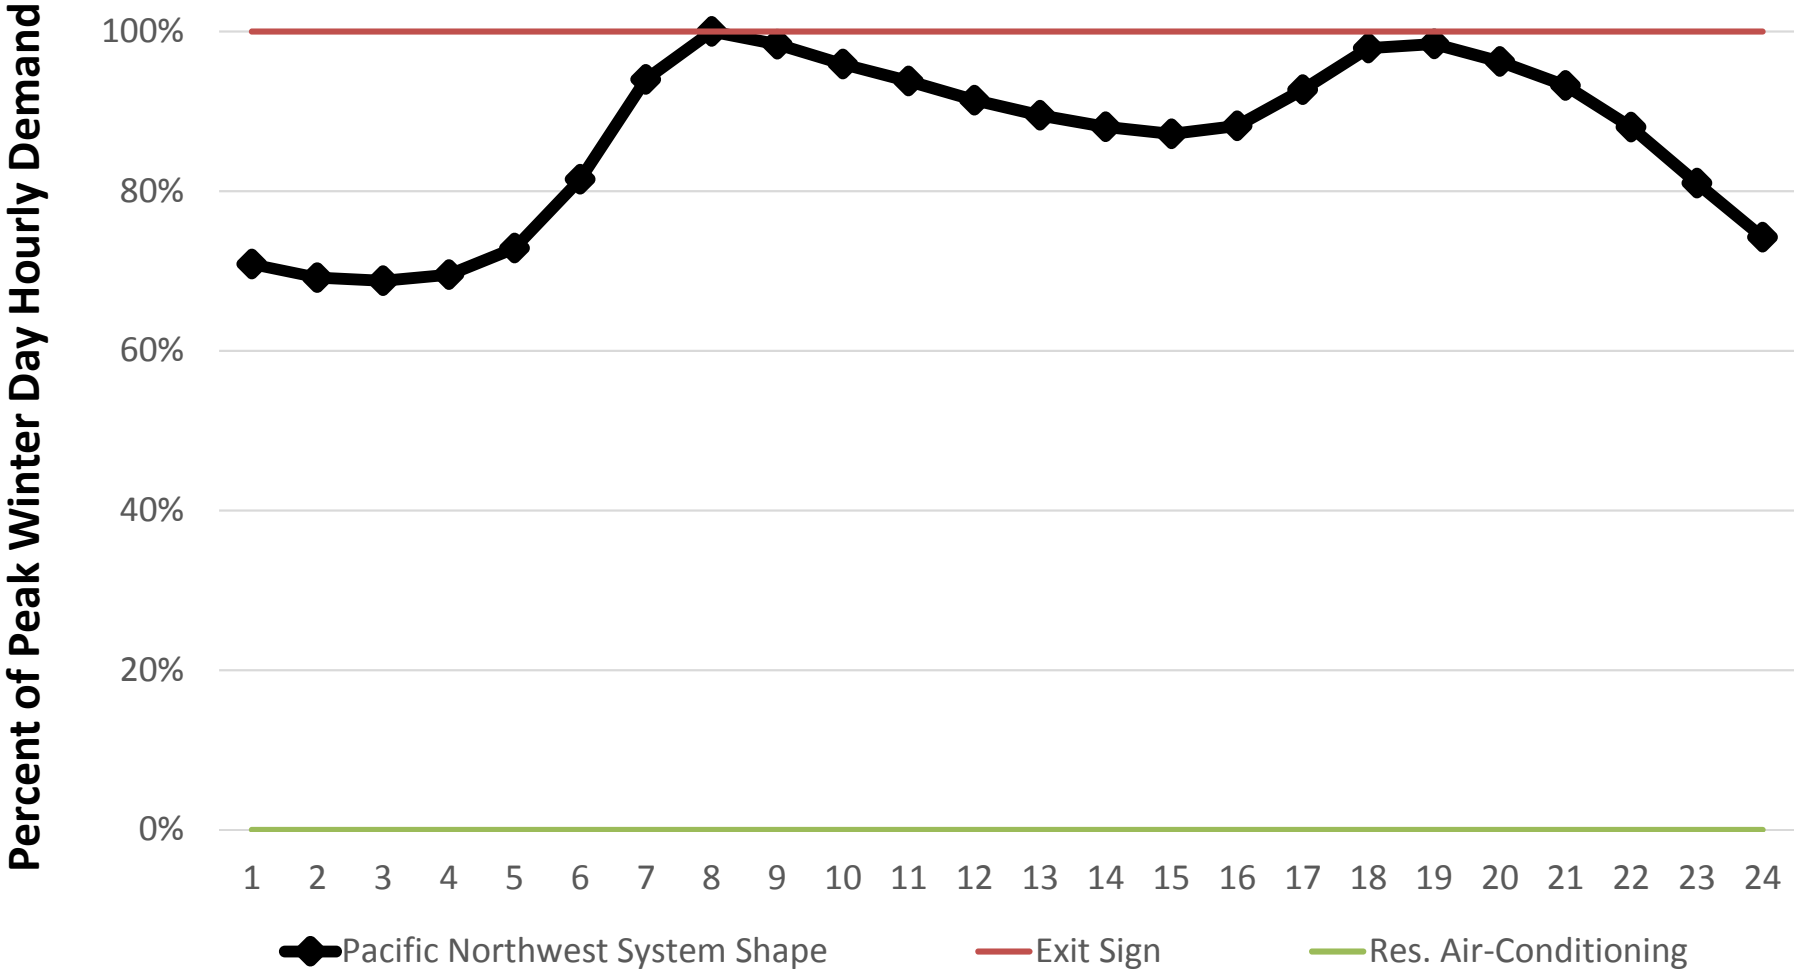


Pacific Northwest System Shapes and End-Use Load Shapes

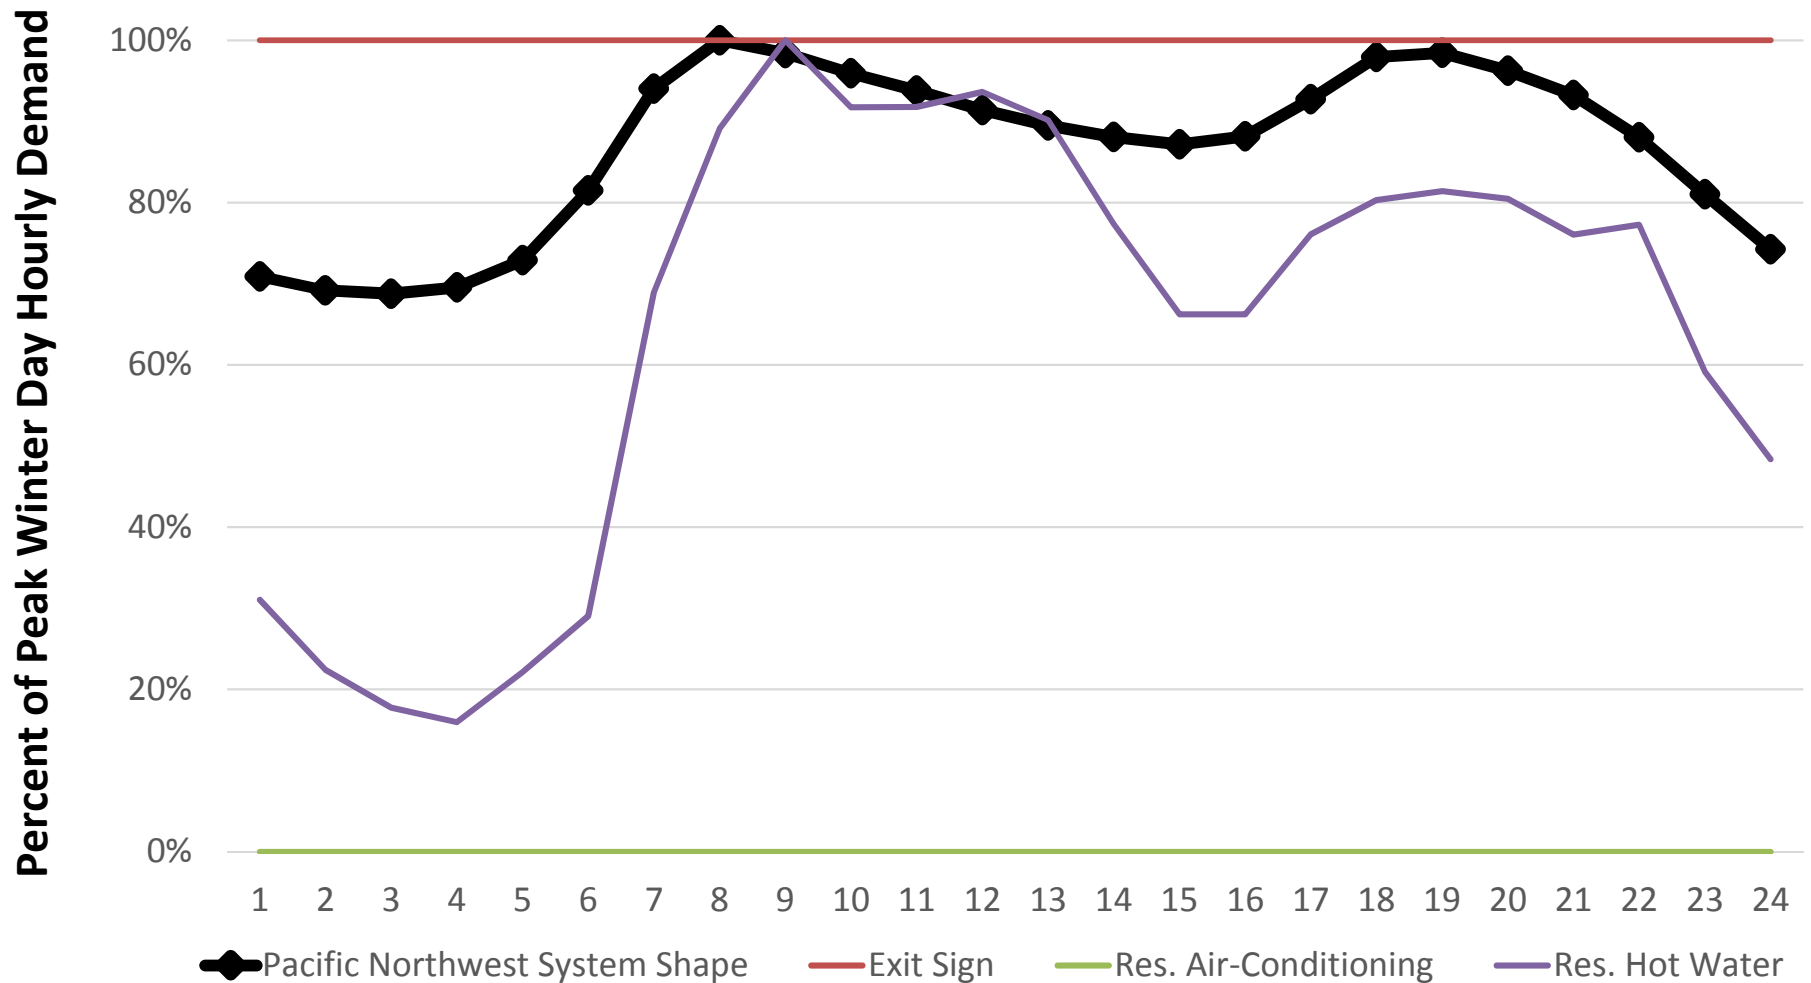


Pacific Northwest System Shapes and End-Use Load Shapes

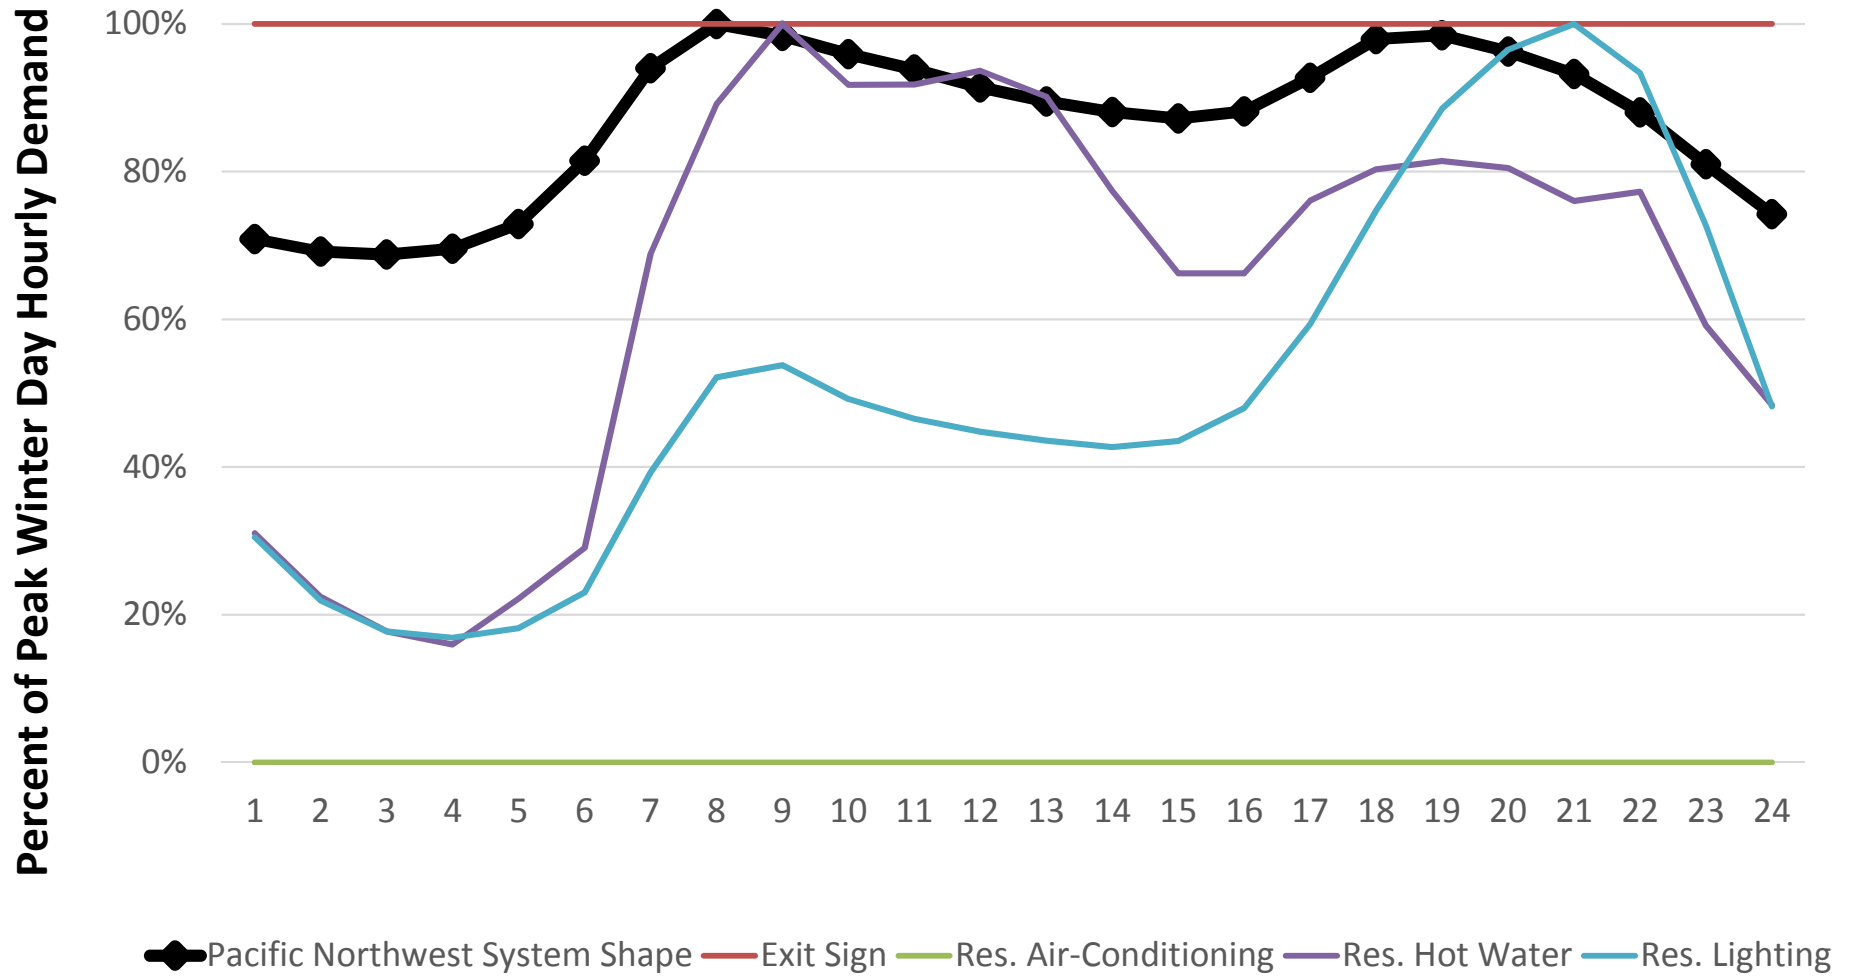


Pacific Northwest System Shapes and End-Use Load Shapes

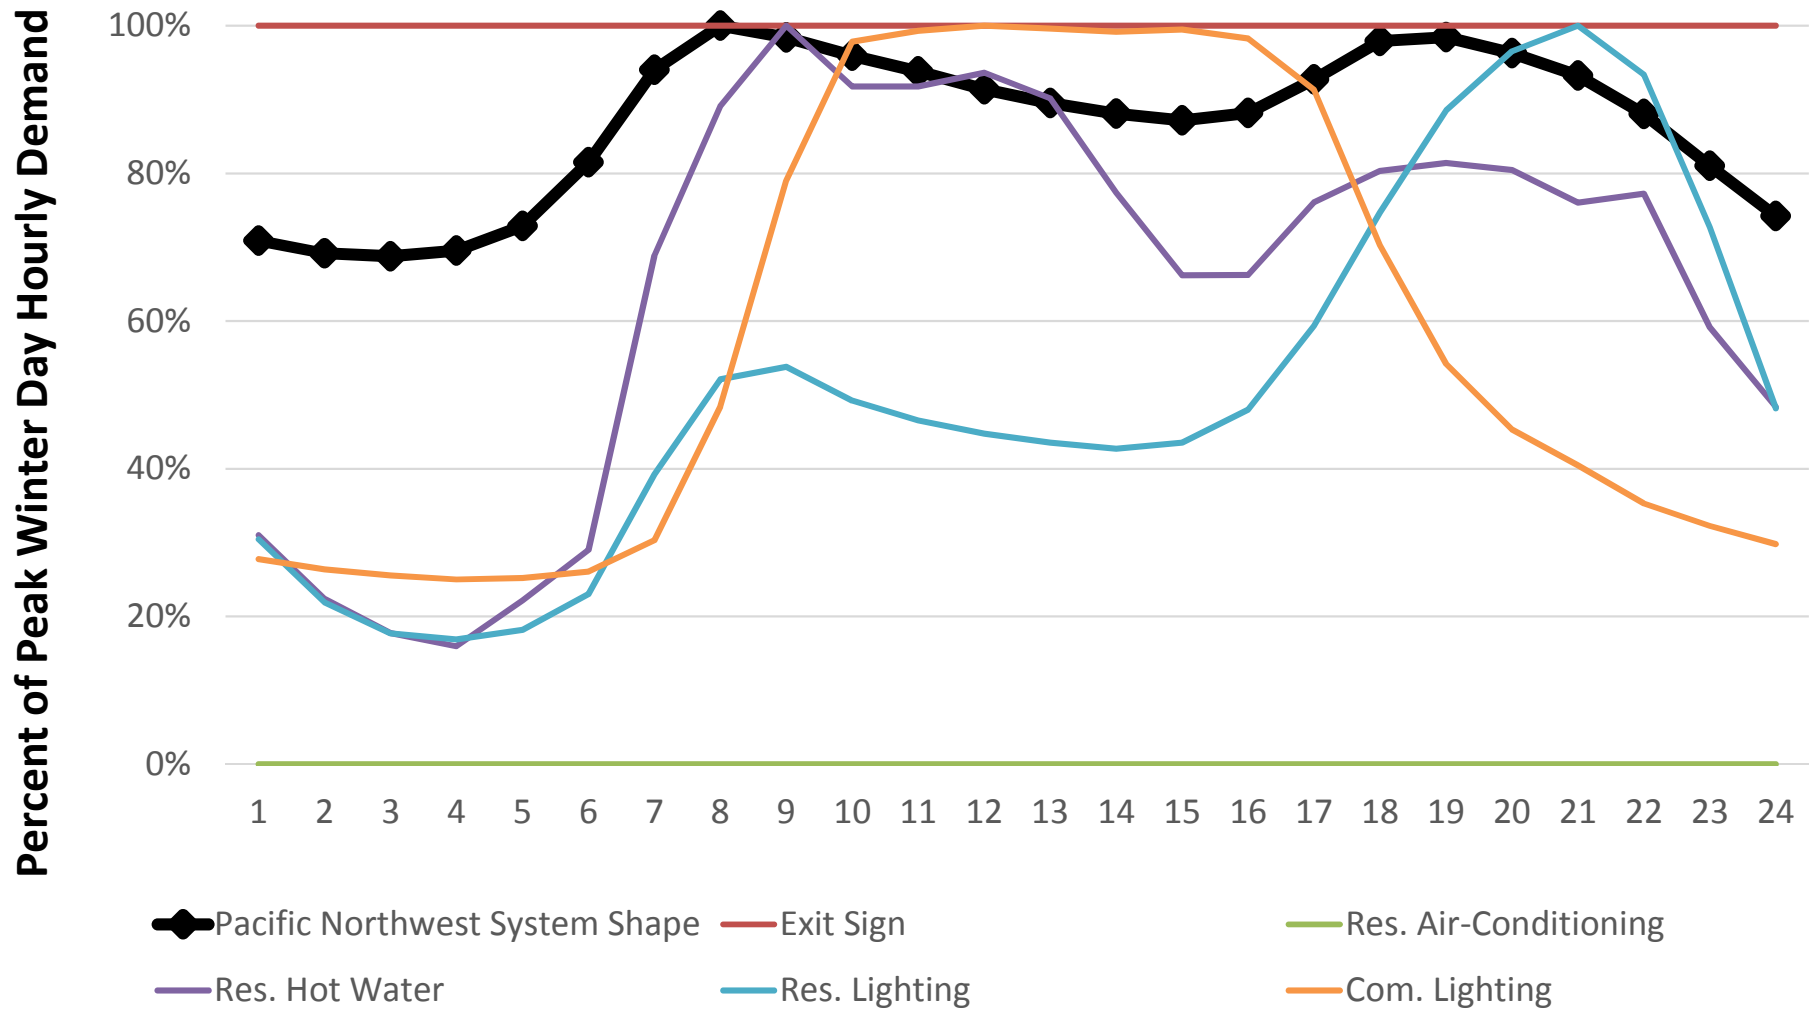


California System Shape and End-Use Load Shapes

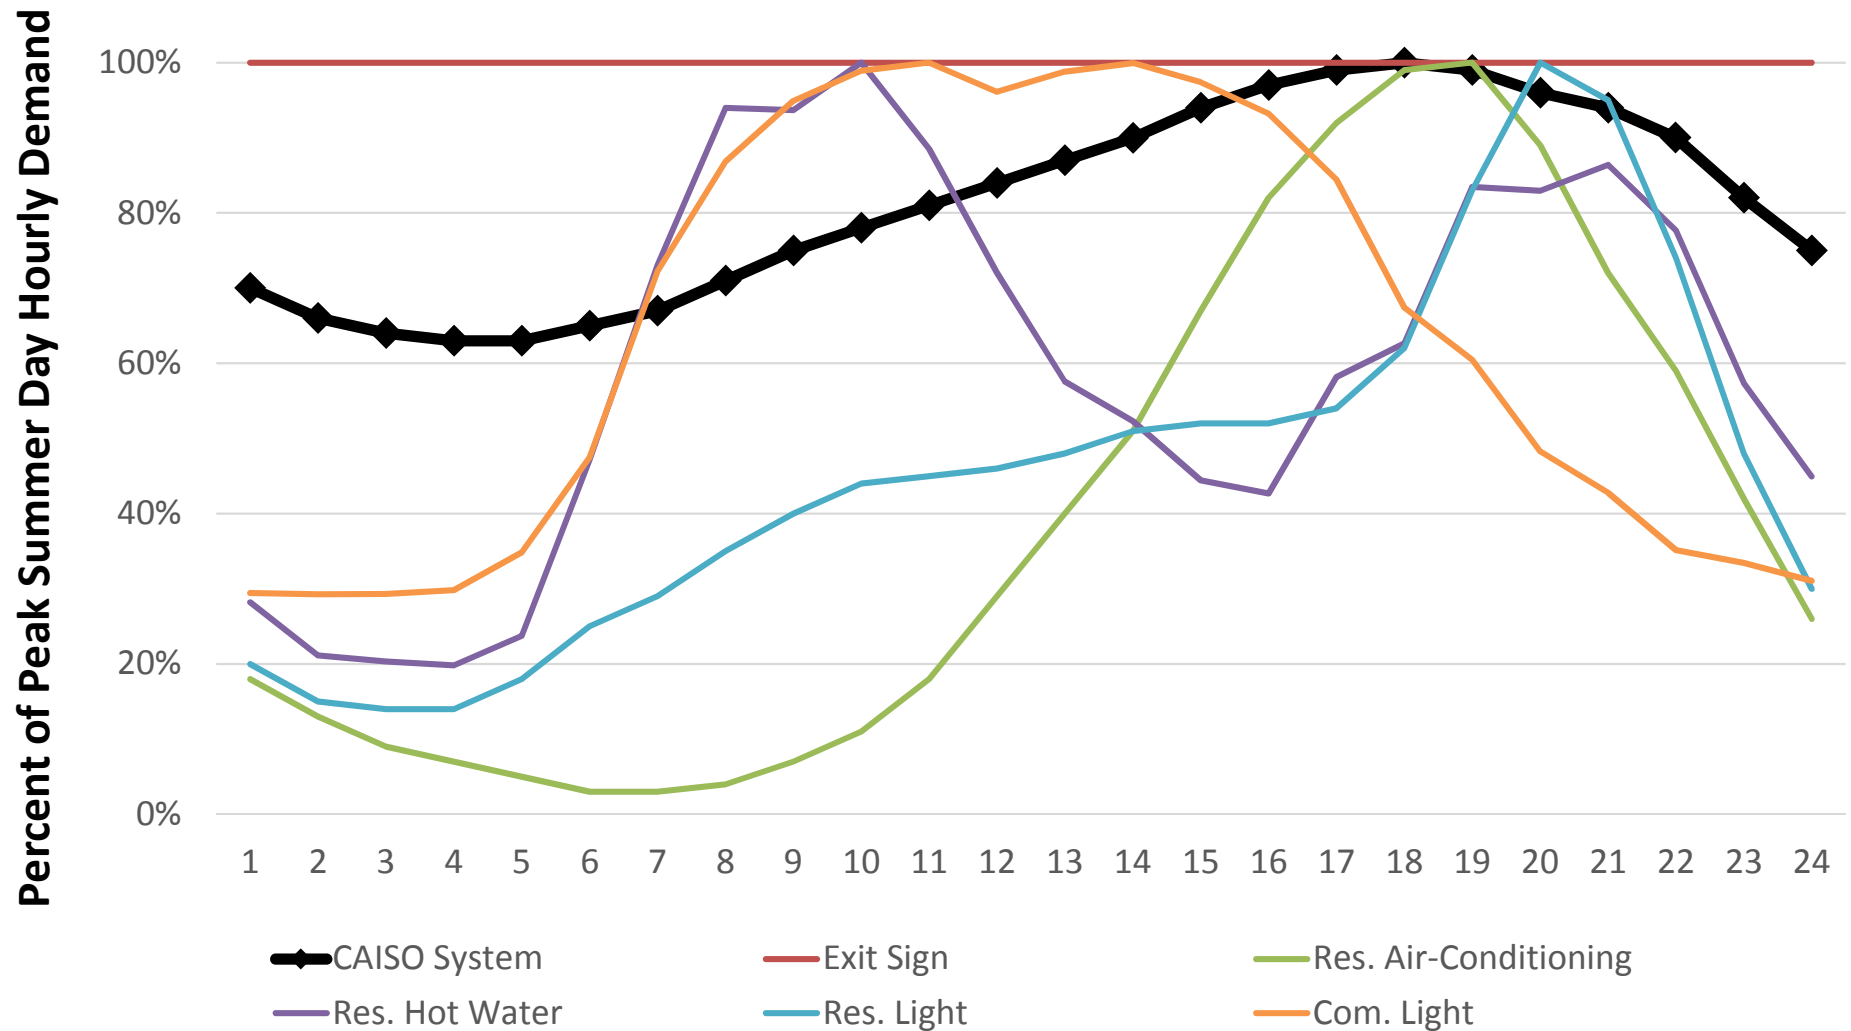


Massachusetts System Shape and End-Use Load Shapes

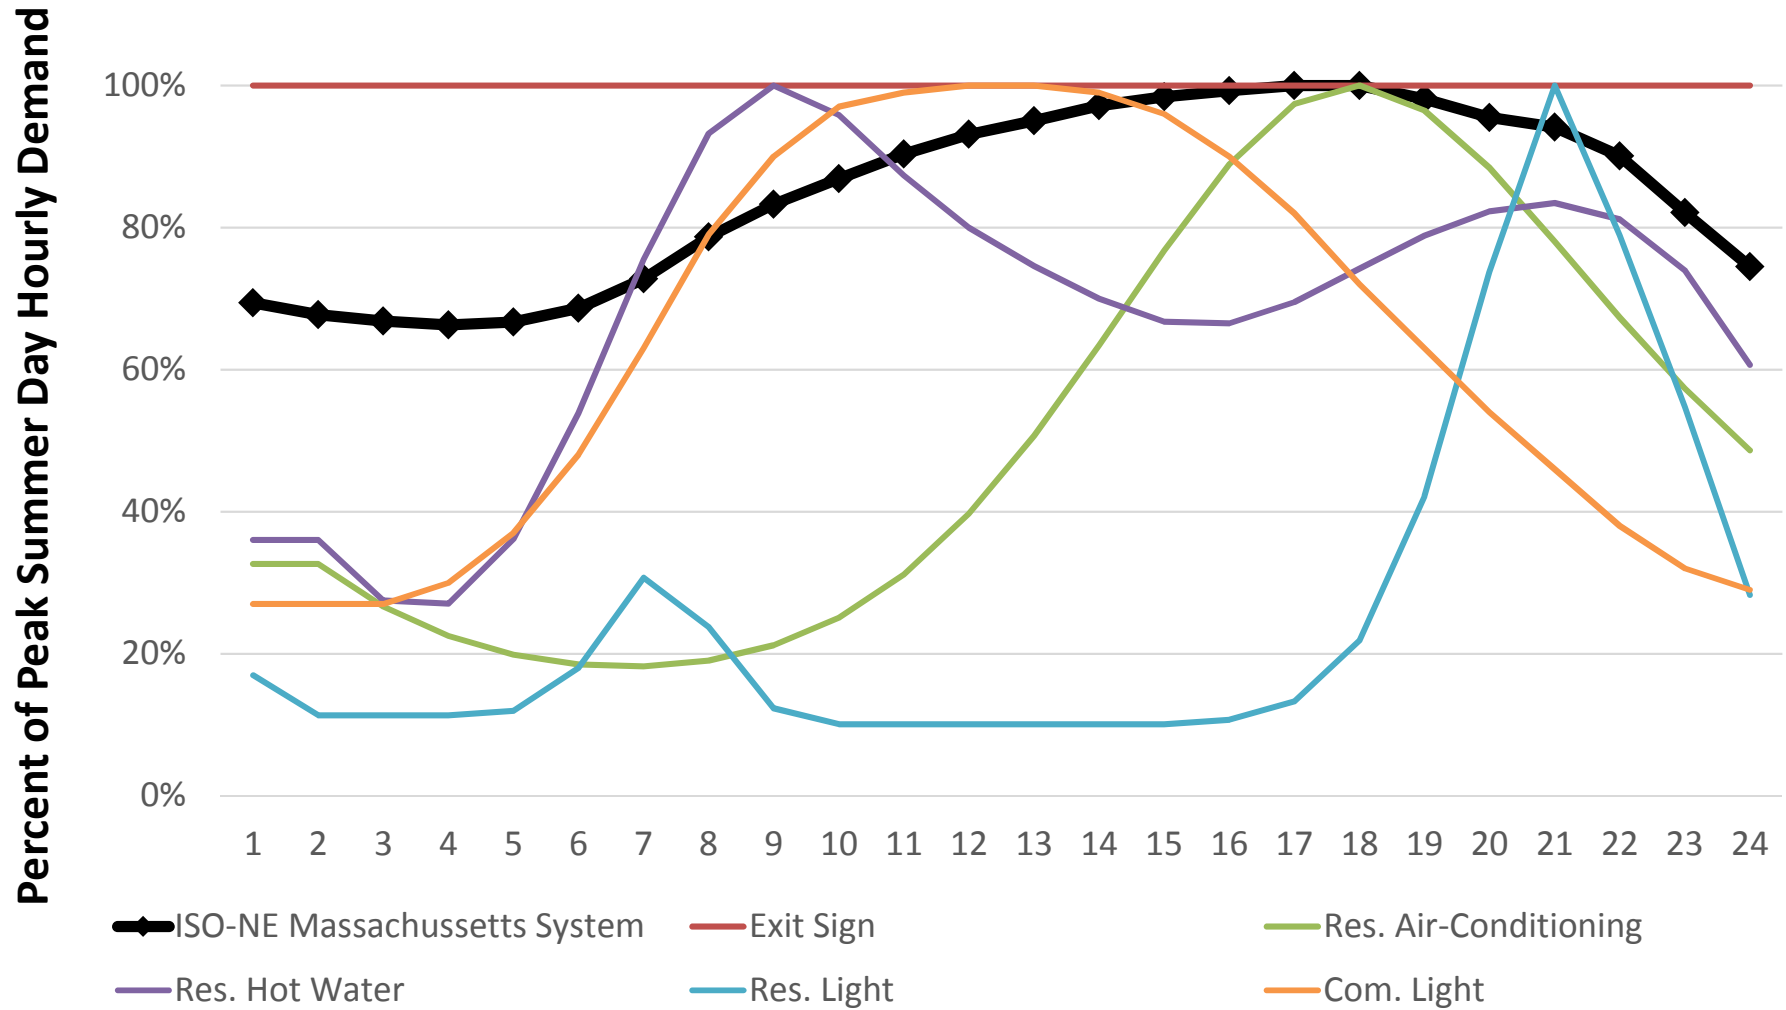

Georgia System Shape and End-Use Load Shapes

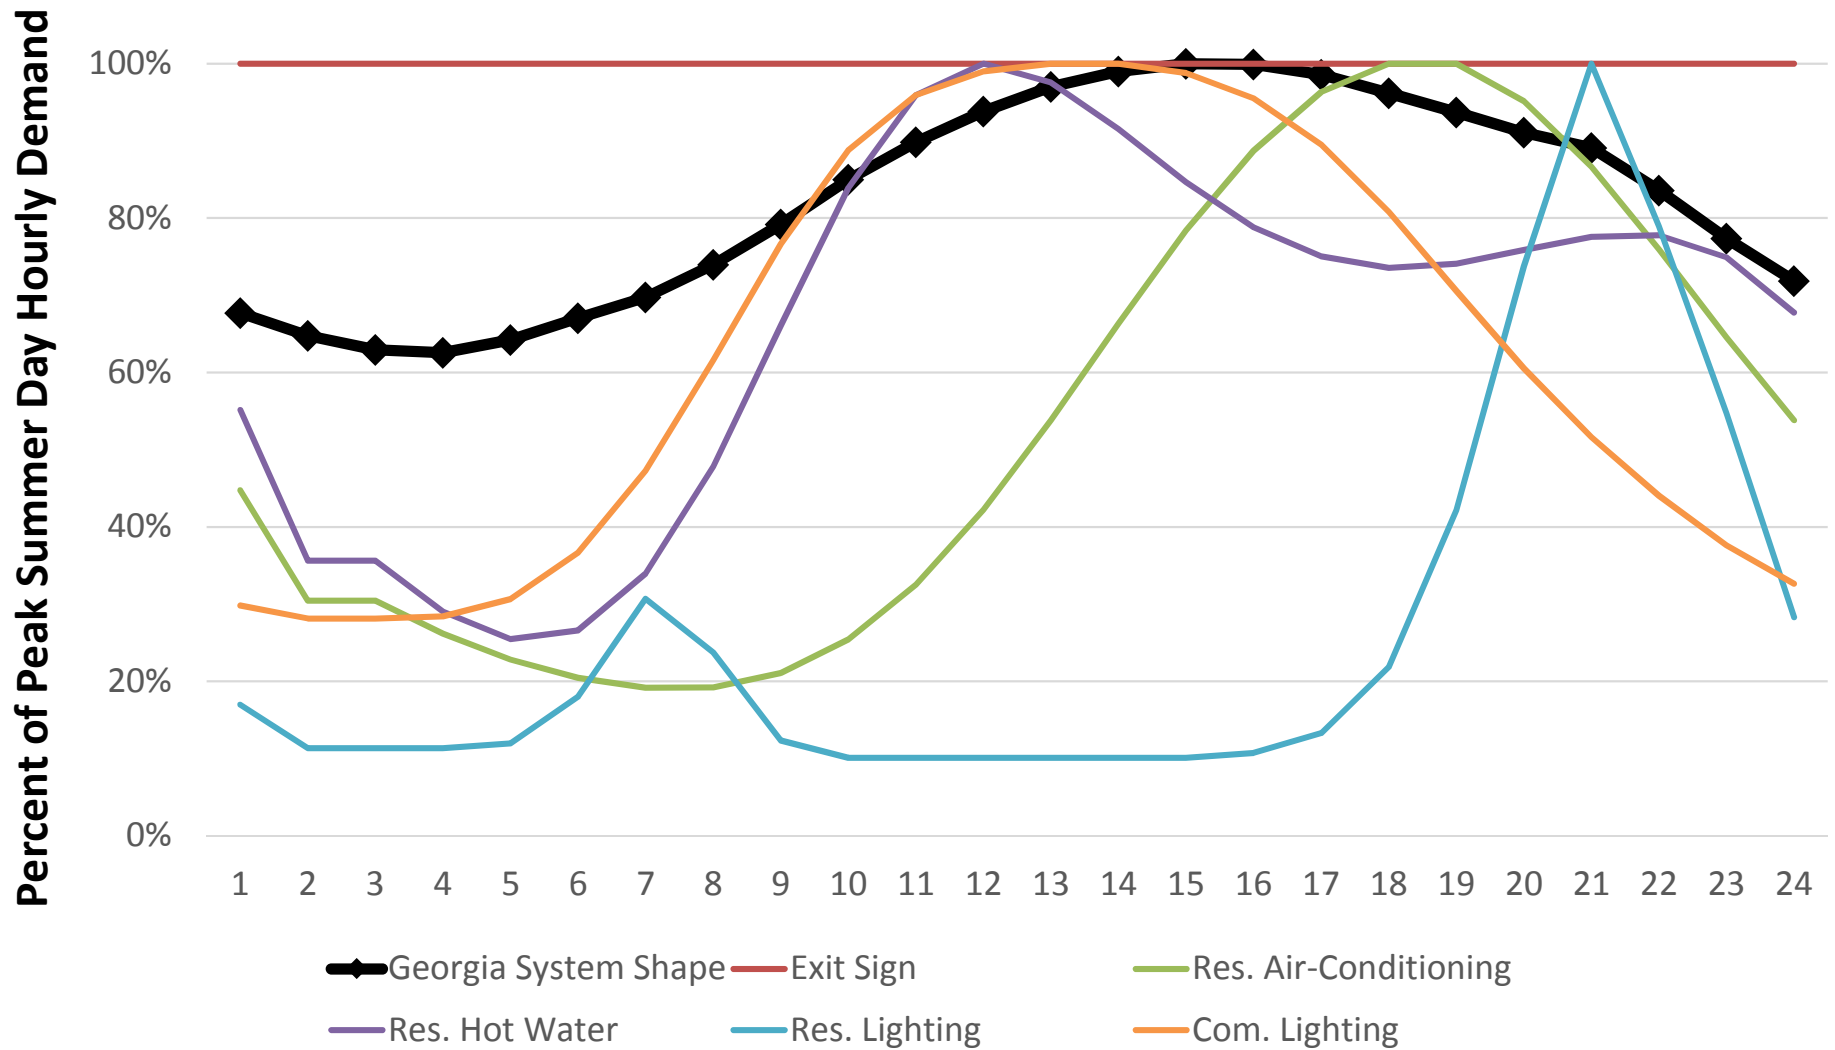

Comparing Total Utility System Value to Energy Value

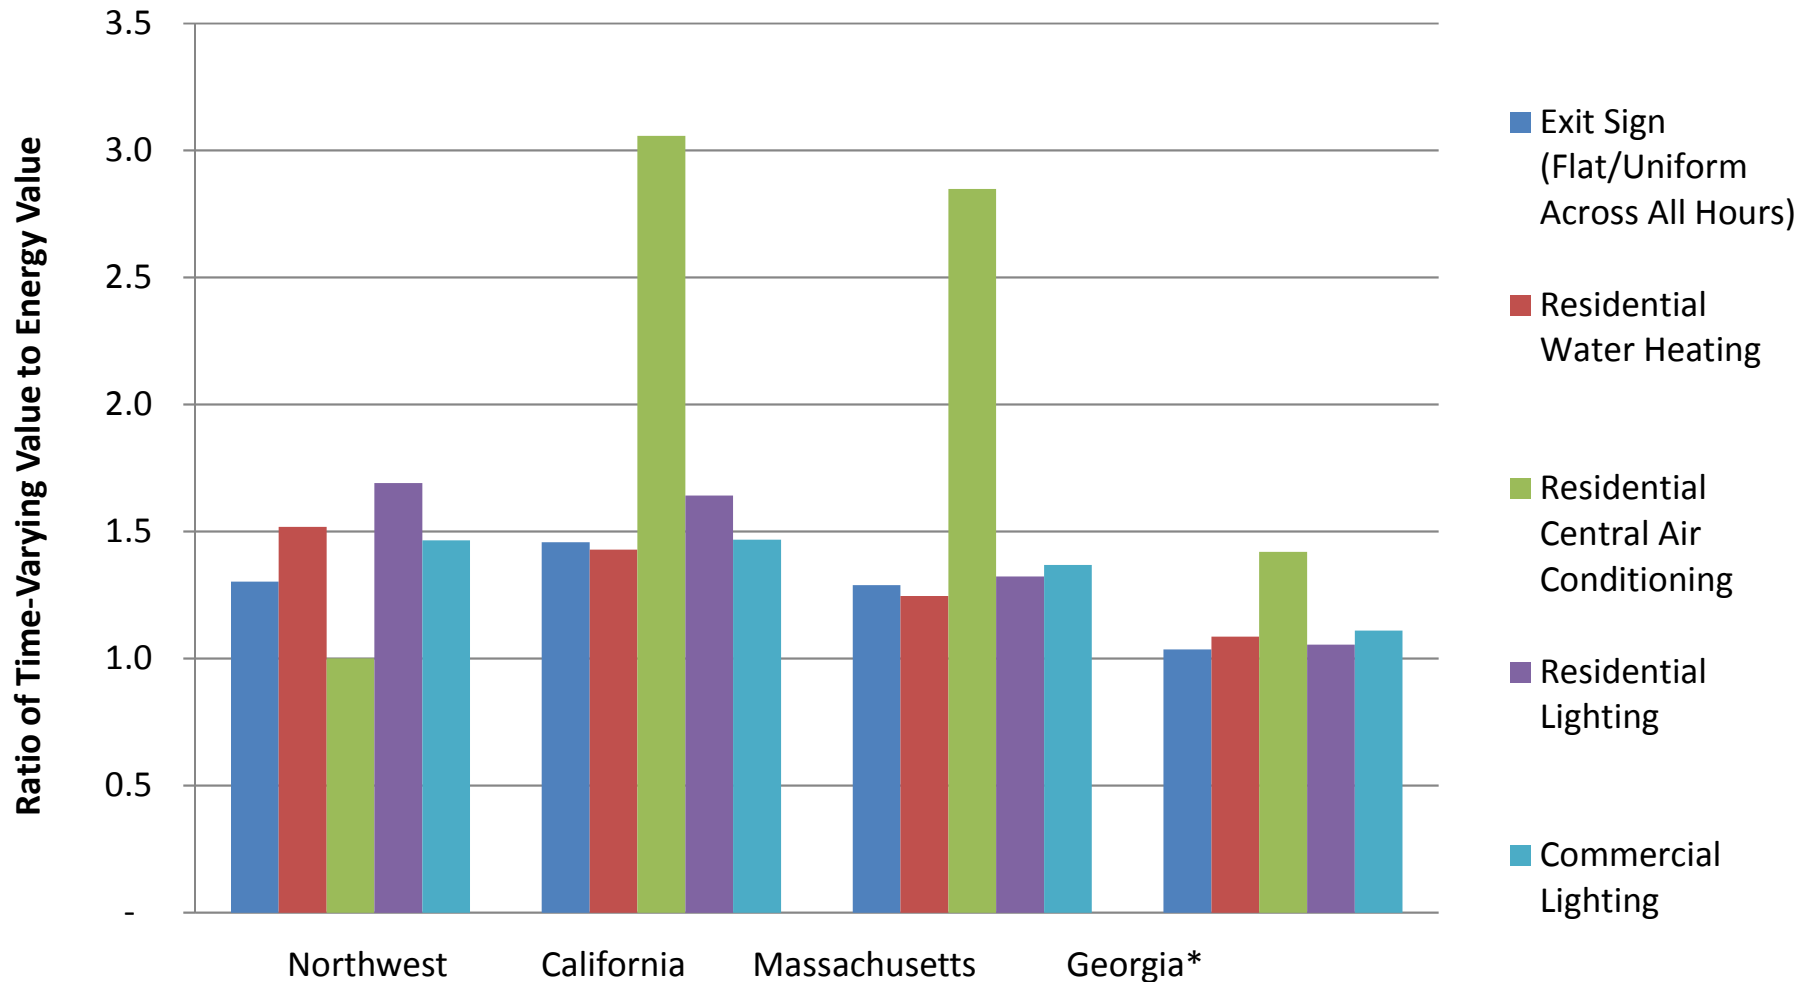


Notes: The flat load shape is an exit sign. Energy value includes: energy, risk, carbon dioxide emissions, avoided RPS and DRIPE, as applicable. Total time-varying value includes all energy values and capacity, transmission, distribution and spinning reserves. Ratios are calculated by dividing total time-varying values by energy-only values.

* In Georgia, where publicly available data did not include avoided transmission and distribution system values, the time-varying value of efficiency appears much lower for all measures evaluated. Avoided transmission and distribution costs are included in Georgia Power's energy efficiency evaluations, but are not a part of the publicly available PURPA avoided cost filing.

Exit Sign (flat load shape)


Measure 1 of 5

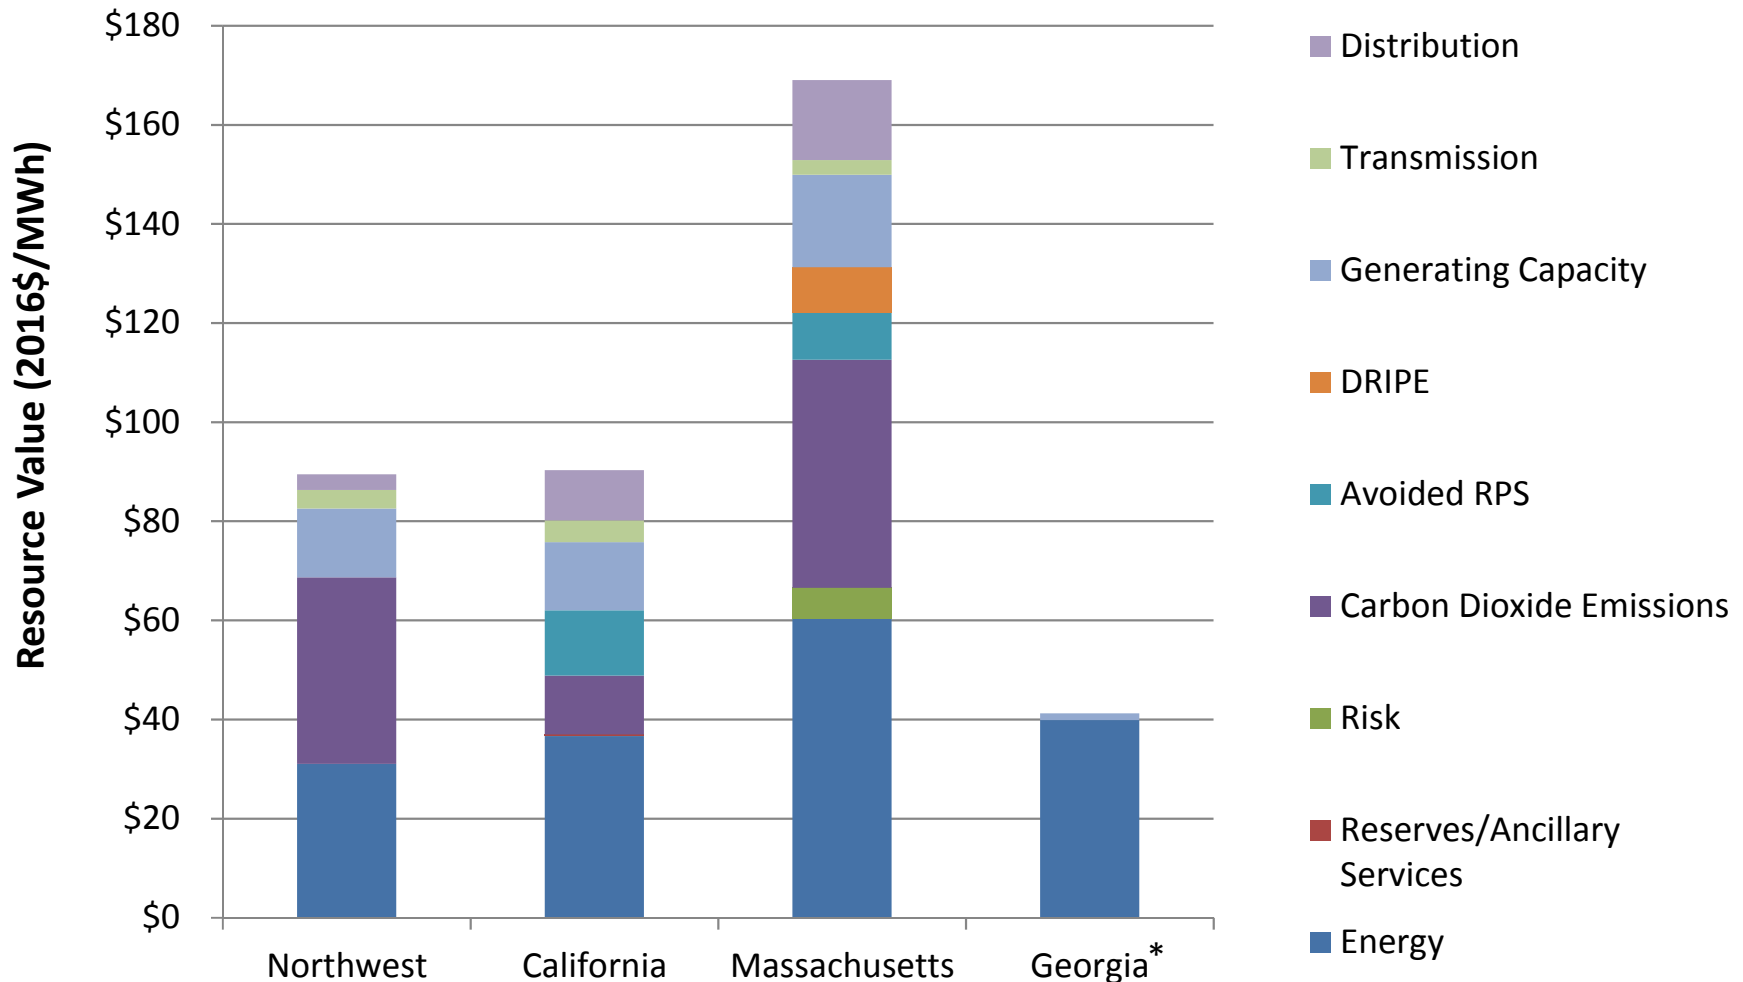

* In Georgia, where publicly available data did not include avoided transmission and distribution system values, the time-varying value of efficiency appears much lower for all measures evaluated. Avoided transmission and distribution costs are included in Georgia Power's energy efficiency evaluations, but are not a part of the publicly available PURPA avoided cost filing.

Residential Central Air-Conditioning


Measure 2 of 5

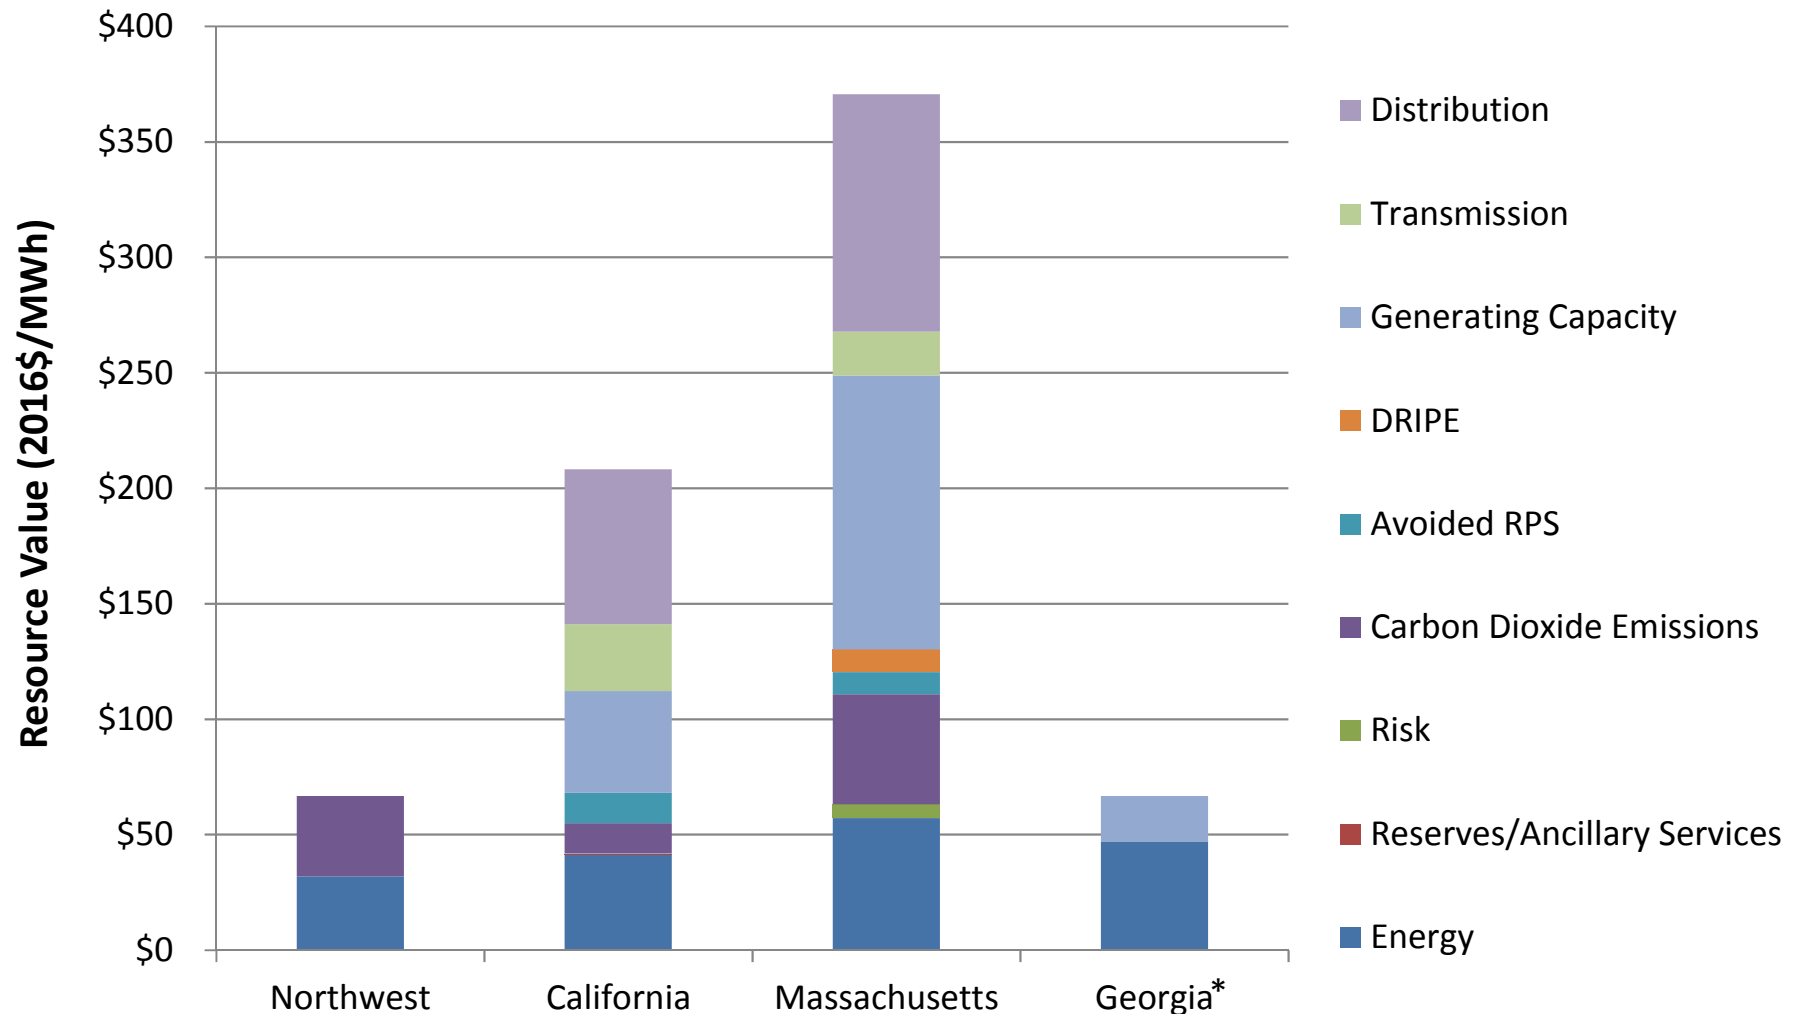

* In Georgia, where publicly available data did not include avoided transmission and distribution system values, the time-varying value of efficiency appears much lower for all measures evaluated. Avoided transmission and distribution costs are included in Georgia Power's energy efficiency evaluations, but are not a part of the publicly available PURPA avoided cost filing.

Residential Hot Water


Measure 3 of 5

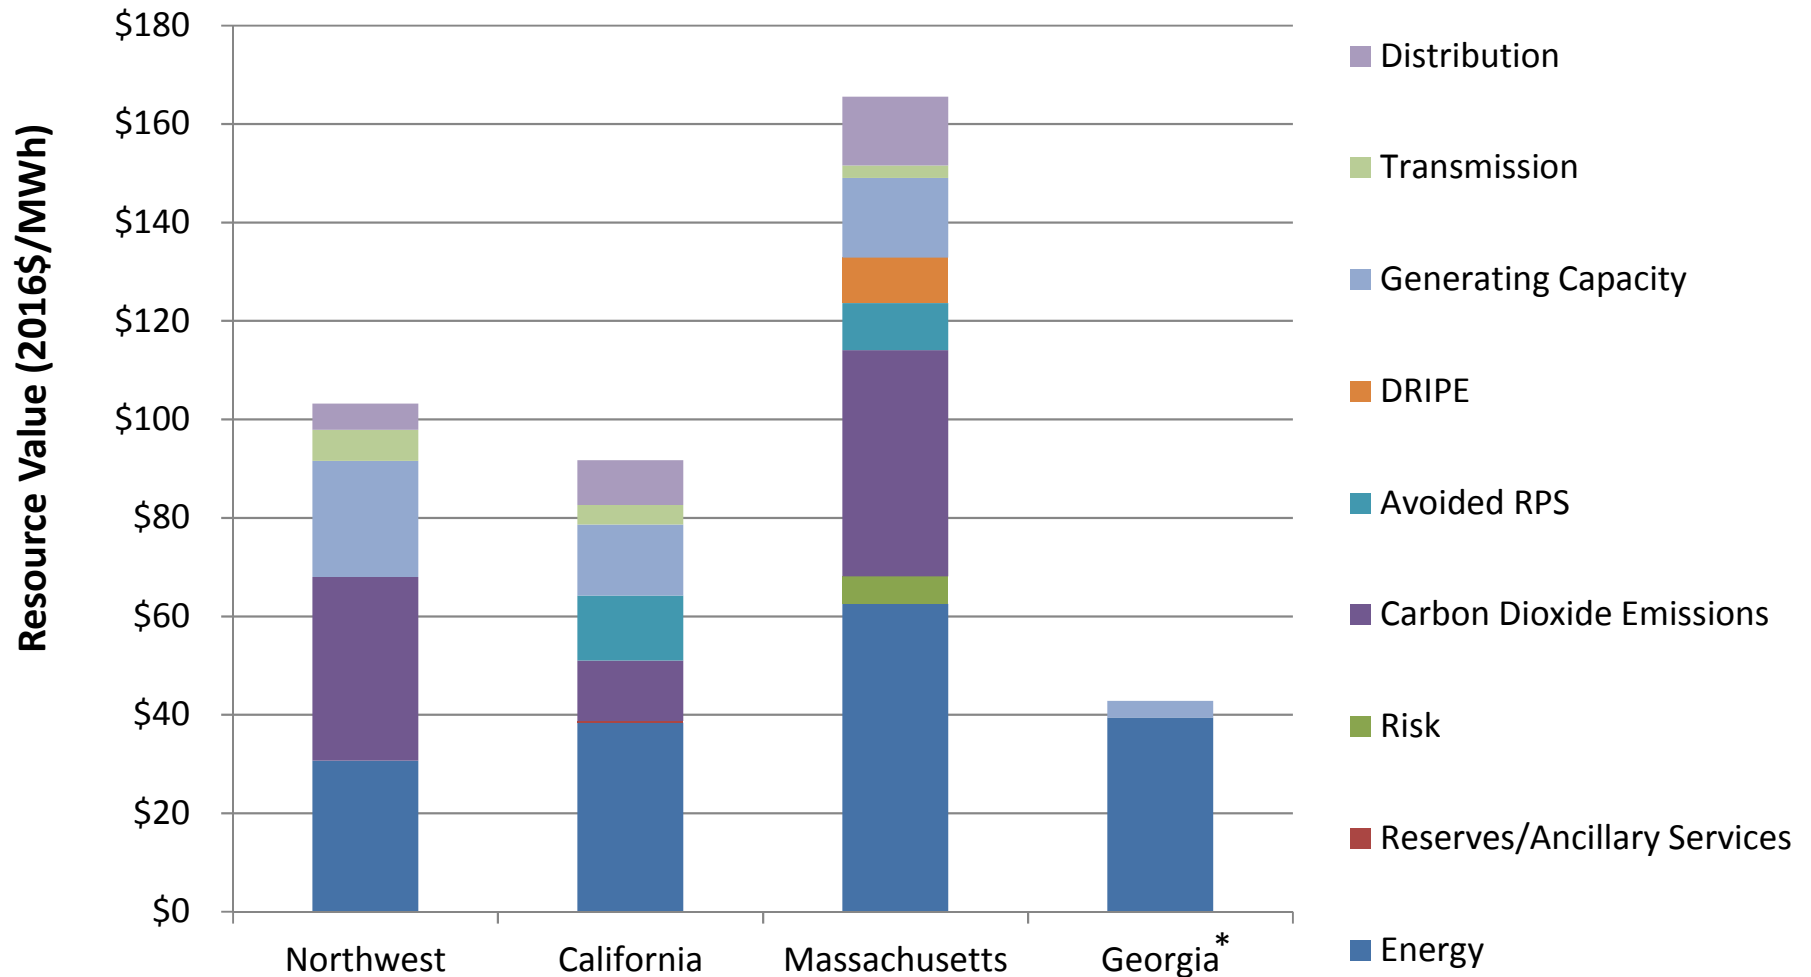

* In Georgia, where publicly available data did not include avoided transmission and distribution system values, the time-varying value of efficiency appears much lower for all measures evaluated. Avoided transmission and distribution costs are included in Georgia Power's energy efficiency evaluations, but are not a part of the publicly available PURPA avoided cost filing.

Residential Lighting


Measure 4 of 5

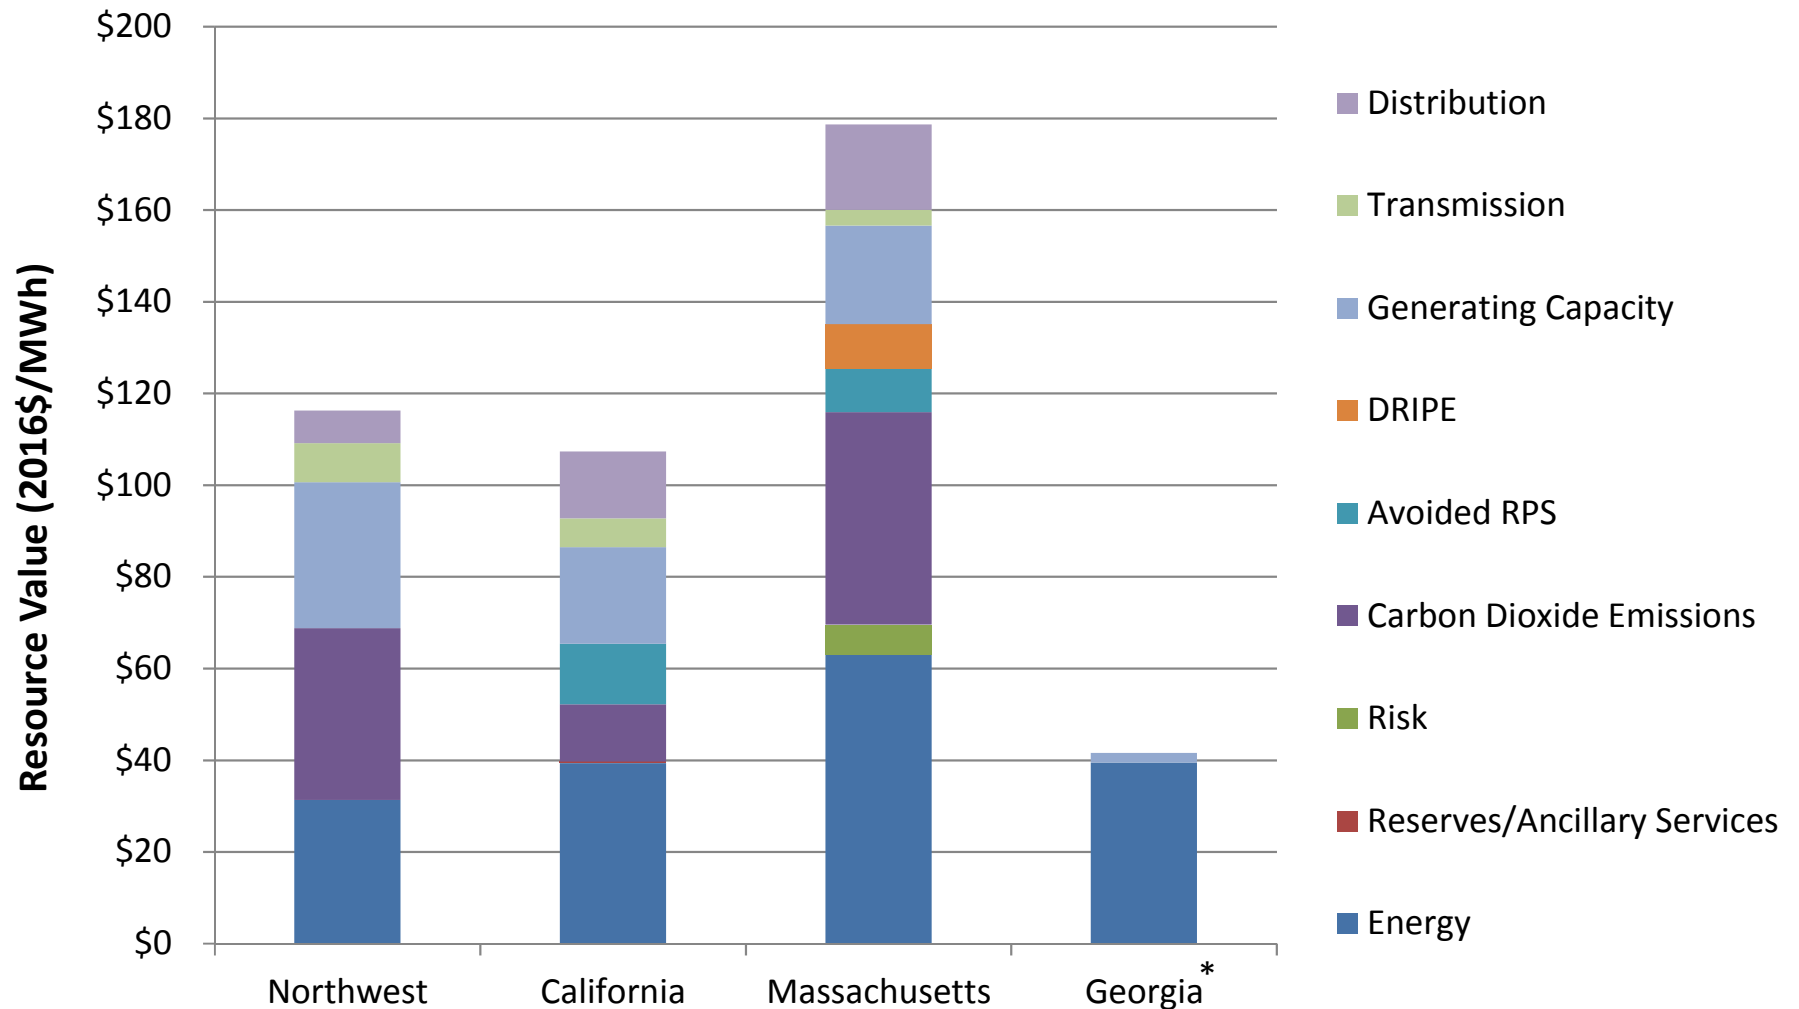

* In Georgia, where publicly available data did not include avoided transmission and distribution system values, the time-varying value of efficiency appears much lower for all measures evaluated. Avoided transmission and distribution costs are included in Georgia Power's energy efficiency evaluations, but are not a part of the publicly available PURPA avoided cost filing.

Commercial Lighting

Measure 5 of 5

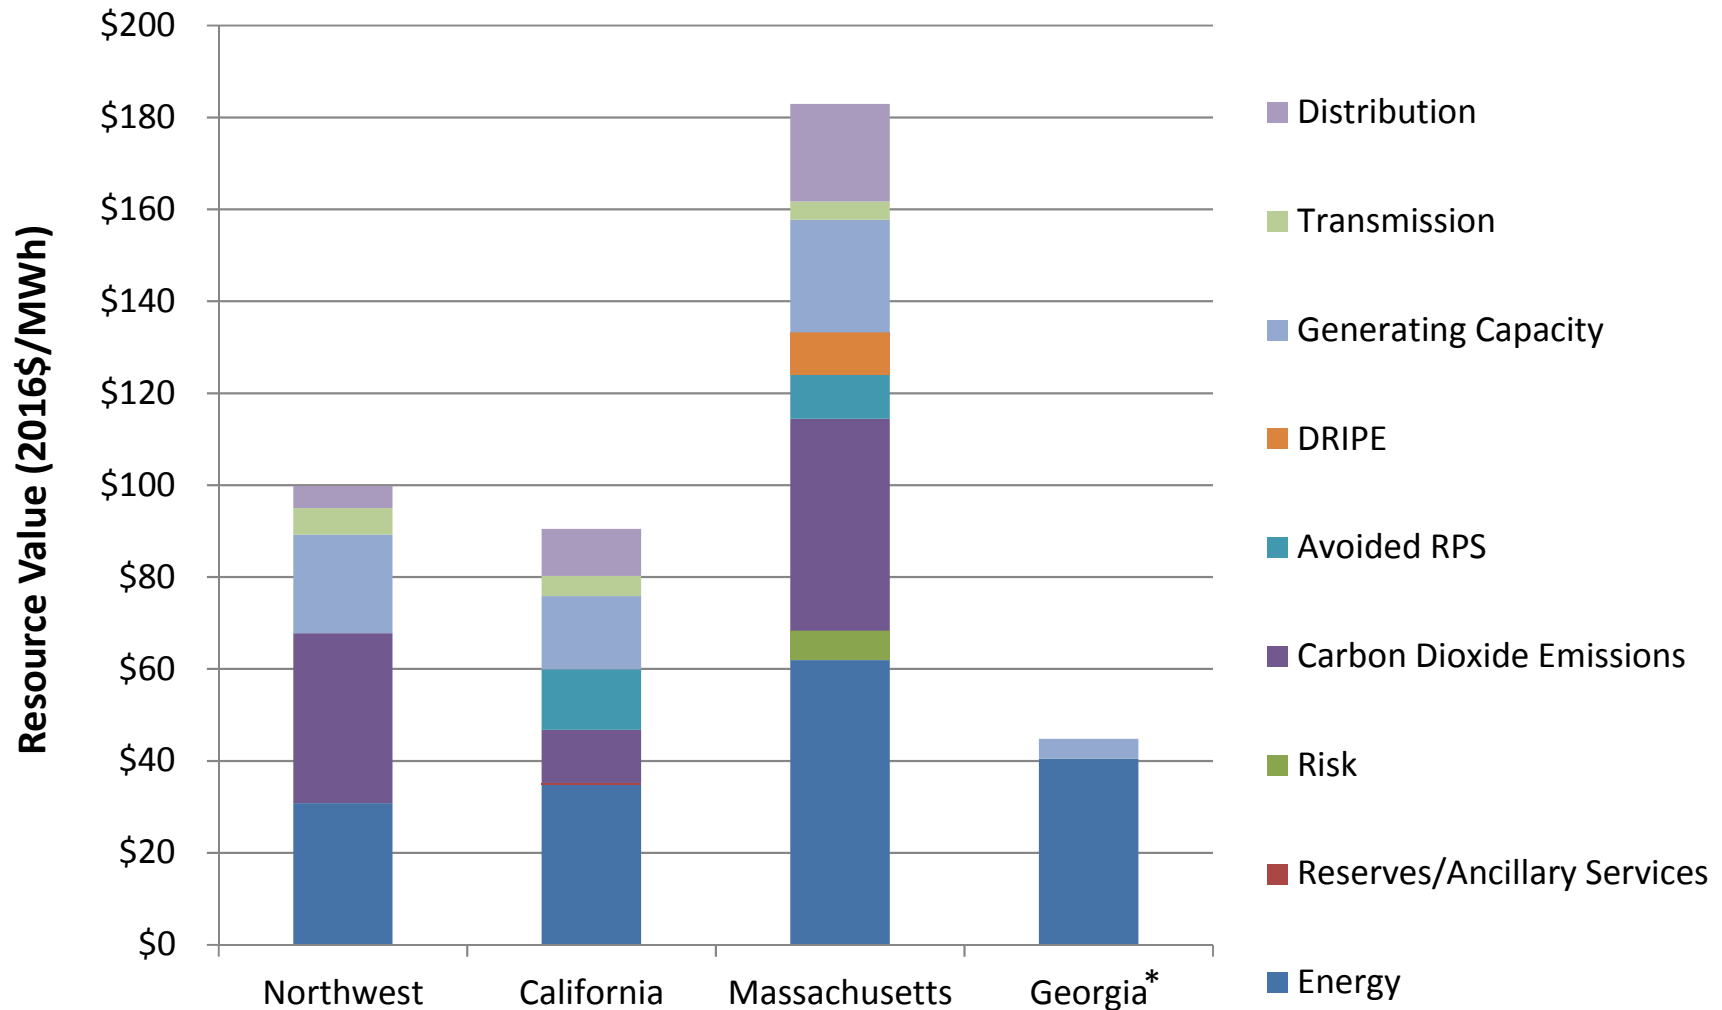

* In Georgia, where publicly available data did not include avoided transmission and distribution system values, the time-varying value of efficiency appears much lower for all measures evaluated. Avoided transmission and distribution costs are included in Georgia Power's energy efficiency evaluations, but are not a part of the publicly available PURPA avoided cost filing.

Conclusions

- ◆ Electric energy efficiency resources save energy and may reduce peak demand.
- ◆ The time-varying value of energy efficiency measures varies across the locations studied because of physical and operational characteristics of the individual utility system, the time periods that the savings from measures occur and differences in the value and components of avoided cost considered.
- ◆ Across the four locations studied, some of the largest capacity benefits from energy efficiency are derived from the deferral of transmission and distribution system infrastructure upgrades. However, the deferred cost of transmission and distribution infrastructure upgrades also exhibited the greatest range in value of all the components of avoided cost across the locations studied.
- ◆ Of the five measures studied, residential air-conditioning has the most significant added value when the total time-varying value is considered in summer peaking systems.

Conclusions (cont'd)

- ◆ The increased use of distributed energy resources and the addition of major new electricity consuming end-uses are anticipated to significantly alter the load shape of many utility systems in the future.
- ◆ Data used to estimate the impact of energy efficiency measures on electric system peak demands will need to be updated periodically to accurately reflect the value of savings as system load shapes change.
- ◆ Publicly available components of electric system costs avoided through energy efficiency are not uniform across states and utilities. Inclusion or exclusion of these components and differences in their value affect estimates of the time-varying value of efficiency.
- ◆ Publicly available data on end-use load and energy savings shapes are limited, concentrated regionally, and should be expanded.

Utility, State or Regional Recommendations

- ◆ Collect metered data on a variety of end-use load and energy savings shapes for the state or region at least at the hourly level and make the data publicly available in a format that can be readily used in planning processes.
- ◆ Account for variations in the calculation of time-varying value of energy savings and avoided costs.
- ◆ Periodically update estimates of the impact of energy efficiency measures on utility system peak demands to accurately reflect changing system load shapes.
- ◆ Study transferability of end-use load shapes from one climate zone to another climate zone.

Regional or National Recommendations

- ◆ Identify best practices for establishing the time-varying value of energy efficiency in integrated resource planning and demand-side management planning to ensure investment in a least-cost, reliable electric system.
- ◆ Establish protocols for consistent methods and procedures for developing end-use load shapes and load shapes of efficiency measures.
- ◆ Establish common methods for assessing the time-varying value of energy savings, including values that are often missing such as deferred or avoided T&D investments.



Energy Technologies Area

Lawrence Berkeley National Laboratory

Natalie Mims

namims@lbl.gov

510-486-7584

Tom Eckman

teckman49@gmail.com

503-803-5047

Chuck Goldman

cagoldman@lbl.gov

510-486-4637

Lisa Schwartz

lcschwartz@lbl.gov

510-486-6315

Visit our website at: <http://emp.lbl.gov/>

Click [here](#) to join the LBNL Electricity Markets and Policy Group mailing list and stay up to date on our publications, webinars and other events. Follow the Electricity Markets & Policy Group on Twitter [@BerkeleyLabEMP](#)